



2024 Edition

Commercial lighting manufacturer since 2009



📍 **Add:** 5F Building B, Xiangshanwan industrial park, Luotian community, Yanluo street, Bao'an district, Shenzhen, China
☎ **Tel :** +86-755-61899338 or +86-755-61899339 Fax:+86-755-61899535
✉ **E-mail:** star@gosunled.com, gosun@gosunled.com
🌐 **Web:** www.gosunled.com
🌐 **Alibaba Web:** gosunled.en.alibaba.com



CONTENTS

P₀₁ - 08 — About us

P₀₉ - 36 — Track light

P₃₇ - 50 — 48V magnetic track light

P₅₁ - 70 — Recessed downlight

P₇₁ - 82 — Surface mounted downlight

P₈₃ - 90 — Projects



ABOUT US

Founded in 2009, Shenzhen Gosun LED Ltd. focuses on the R&D, production and sales of LED interior lighting products. Our company is located in Bao'an District, Shenzhen, covering an area of 4,000 square meters. There are more than 100 employees. The company has passed ISO9001:2015 quality management system and won the title of national high-tech enterprise.

We have in-depth cooperation with major raw material brands. With complete varieties, all products are independently developed and designed with patents including downlight, spotlight, track light and linear light. The products are of exquisite appearance and complete functions with the characteristics of anti-glare, high brightness, high color rendering and flicker free. Besides, intelligent functions are provided such as various colors, dimming and CCT tunable to meet various application requirements. All products have passed CB, TUV, RCM, SAA, ETL, UKCA, CCC, CE and RoHS, and meet the certification of different markets around the world.

Because of first-class quality, unique design, reasonable price and excellent reputation, the products are mainly sold to high-end markets in Europe, the United States, Australia, the Middle East, Southeast Asia, etc. The products are widely used in supermarkets, stores, hotels and restaurants. We have cooperated with a variety of brands around the world in major projects, such as the shooting venues of the Tokyo 2020 Olympic Games, Korean Television, Ferrari, Puma, Payless, as well as abundant well-known projects such as shopping malls and hotels.

With a perfect organizational structure, the main departments include design department, R&D department, mold department, production department, procurement department, storage department, sales department and other professional management and production departments. We are looking forward to working with all partners to create a promising future.



We insist "honest, professional, mutual-benefit" as a concept, and we always adhere to the principle of cutting-edge quality, attractive appearance and easy to use. Through unremitting efforts, our company has become one of the major supplier of LED areas. We have been viewing experiences and customer requirements as the center of work, pursuit of high quality and excellent service, continuing to explore and beyond. We look forward to cooperate with all our partners to create a better future.



PROFESSIONAL INSTRUMENTS




CERTIFICATE




PRODUCT TESTING




Optics

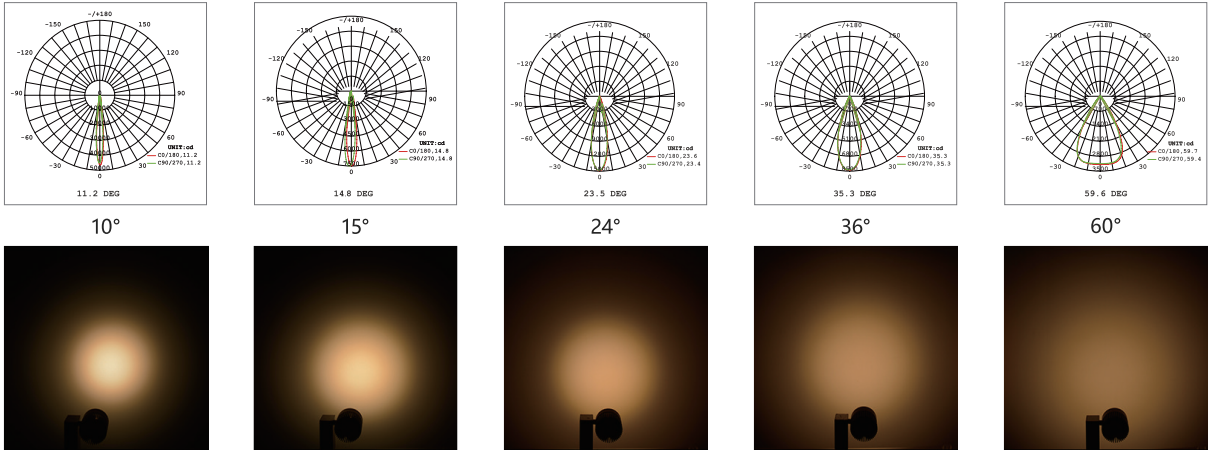

ZHAGA standard

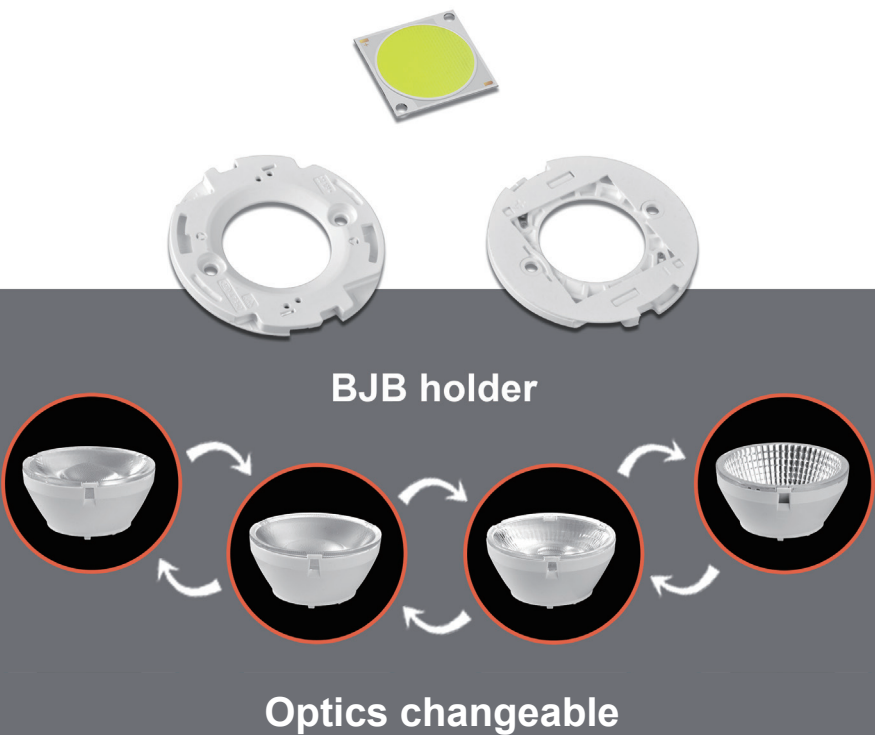


Zoom Optics

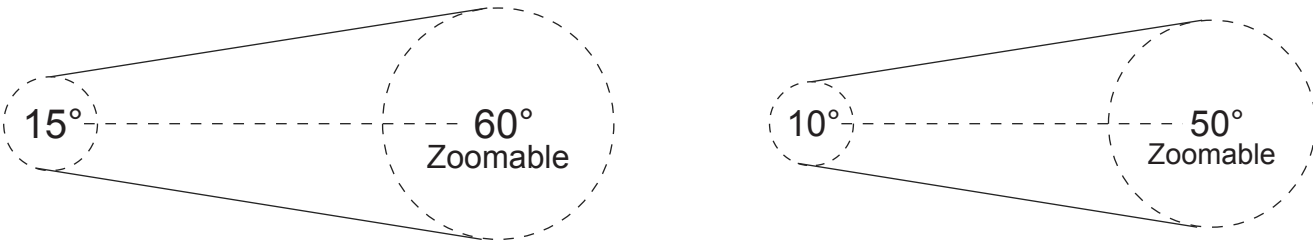

Contour projector



More intelligent

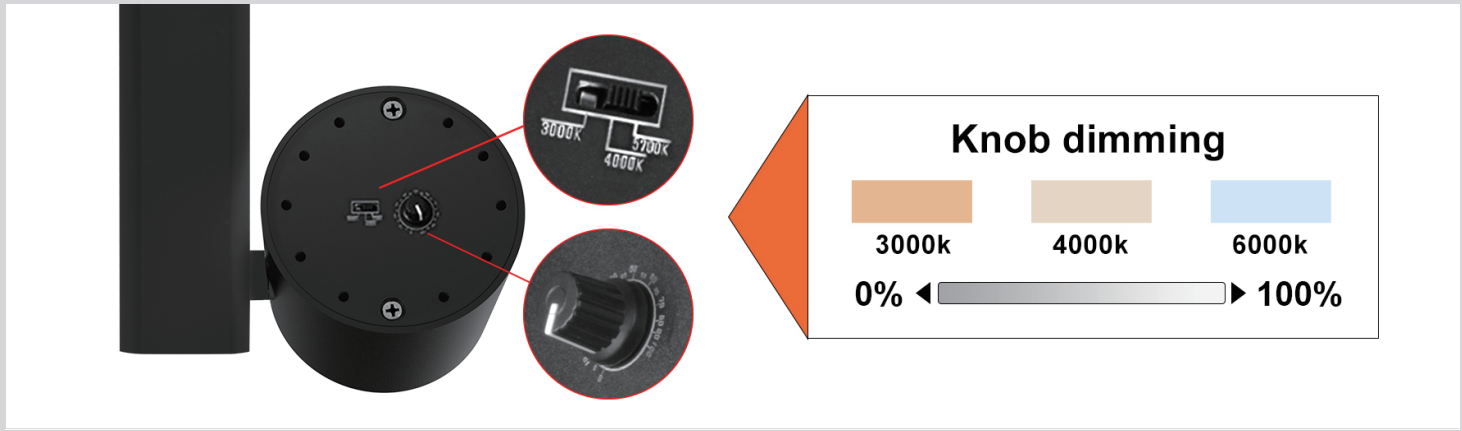

single color TRIAC, 0-10v DALI



2700-6000K tunable RF2.4G/Wi-Fi/Zigbee/Bluetooth/DALI DT8




RGBW DMX512/TUYA/DALI DT8




High light effect

CITIZEN/BRIDGELUX/CREE/GOSUN COB


LM80

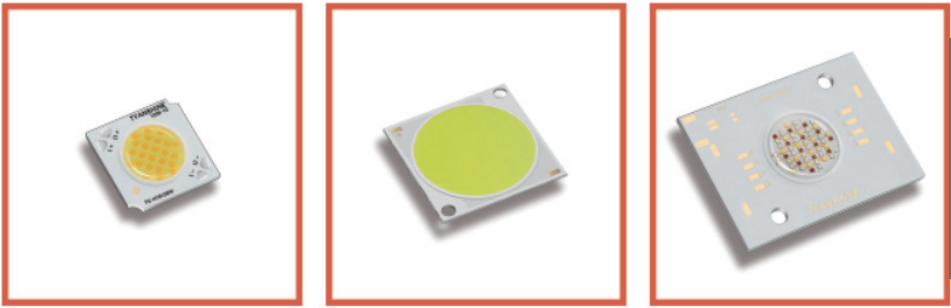


CRI90/CRI97
H:175lm/W (Ra90)
S:140lm/W (Ra90)

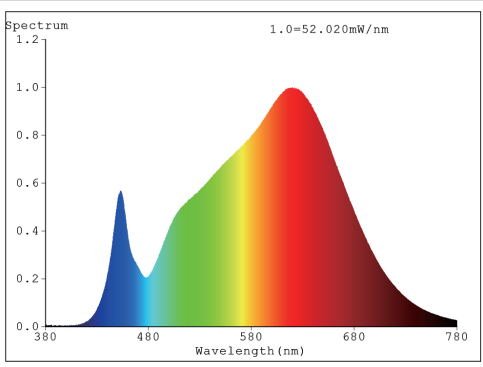

CRI90

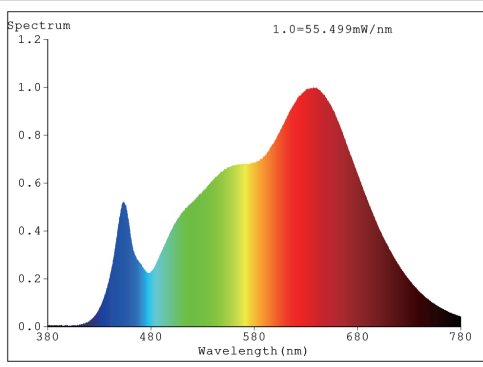

CRI97

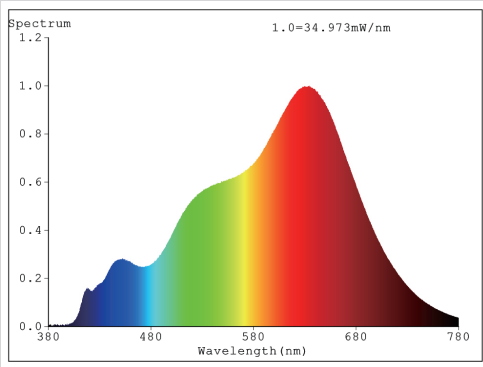

Sunlike

Brand Cooperation



TRACK LIGHT SERIES



SFR SERIES P11 - 12

SFE SERIES P13 - 15

SFL SERIES P16 - 18

SFZ SERIES P19 - 20

SFC SERIES P21

SFN SERIES P22

UFE SERIES P23

UFZ SERIES P24

UFK SERIES P25

UFB SERIES P26

UFD SERIES P27

MFE SERIES P28

MFZ SERIES P29

MFA SERIES P30

TFM SERIES P31


TFS SERIES P32 - 34

CONTENTS

SFR series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19




Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WRC60	15W	φ60*L108mm	1400-1600lm	1300-1400lm	1100-1200lm	52x41x35cm (16 pcs/carton, 10.5kg)
GS-TL25WRC75	25W	φ75*L135mm	3200-3400lm	2700-3000lm	2500-2800lm	58x47x43cm (15 pcs/carton, 13.8kg)
GS-TL36WRC90	36W	φ90*L160mm	3700-4200lm	3400-3800lm	3200-3400lm	57x48x37cm (12 pcs/carton, 13.2kg)


Dimmable

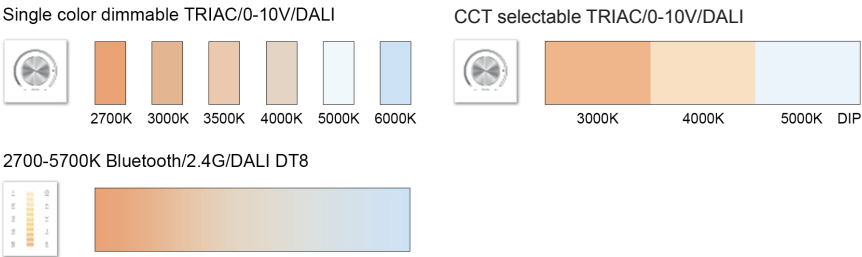

SFR series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19




Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WRO60	15W	φ60*L108mm	1400-1600lm	1300-1400lm	1100-1200lm	44X29X33cm (20 pcs/carton, 14.4kg)
GS-TL25WRO75	25W	φ75*L135mm	3200-3400lm	2700-3000lm	2500-2800lm	50X30X39cm (20 pcs/carton, 17.8kg)
GS-TL36WRO90	36W	φ90*L160mm	3700-4200lm	3400-3800lm	3200-3400lm	56X31X33cm (15 pcs/carton, 15.3kg)


Dimmable

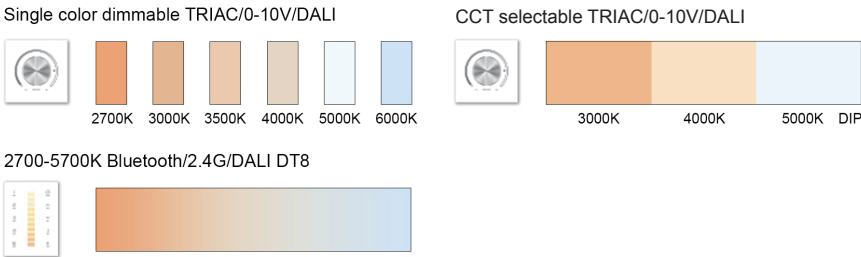

SFE series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19



Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WEC55	15W	φ55*L120mm	1400-1600lm	1300-1400lm	1100-1200lm	52x41x35cm (16 pcs/carton, 10.5kg)
GS-TL20WEC66	20W	φ66*L125mm	2100-2400lm	1900-2100lm	1700-2000lm	52x41x35cm (16 pcs/carton, 12.5kg)
GS-TL30WEC77	30W	φ77*L140mm	3200-3400lm	2700-3000lm	2500-2800lm	58X47X43cm (15 pcs/carton, 13.8kg)
GS-TL32WEC80	32W	φ80*L145mm	3300-3600lm	3000-3300lm	2800-3100lm	57X48X37cm (12 pcs/carton, 13.2kg)
GS-TL36WEC88	36W	φ88*L160mm	3700-4200lm	3400-3800lm	3200-3400lm	57X48X37cm (12 pcs/carton, 13.2kg)
GS-TL42WEC99	42W	φ99*L160mm	4300-4600lm	3900-4200lm	3600-3700lm	58X52X41cm (12 pcs/carton, 19.8kg)
GS-TL50WEC113	50W	φ113*L150mm	5200-5500lm	4800-5000lm	4400-4600lm	58X52X41cm (12 pcs/carton, 19.8kg)

SFE series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19




Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WEI66	15W	φ66*L125mm	1400-1600lm	1300-1400lm	1100-1200lm	44X29X33cm (20 pcs/carton, 14.4kg)
GS-TL20WEI77	20W	φ77*L140mm	2300-2400lm	2000-2100lm	1800-2000lm	50X30X39cm (20 pcs/carton, 17.8kg)
GS-TL32WEI88	32W	φ88*L160mm	3300-3600lm	3000-3300lm	2800-3100lm	56X31X33cm (15 pcs/carton, 15.3kg)
GS-TL40WEI99	42W	φ99*L160mm	4100-4400lm	3800-4000lm	3500-3700lm	57X48X37cm (12 pcs/carton, 13.2kg)

SFE series

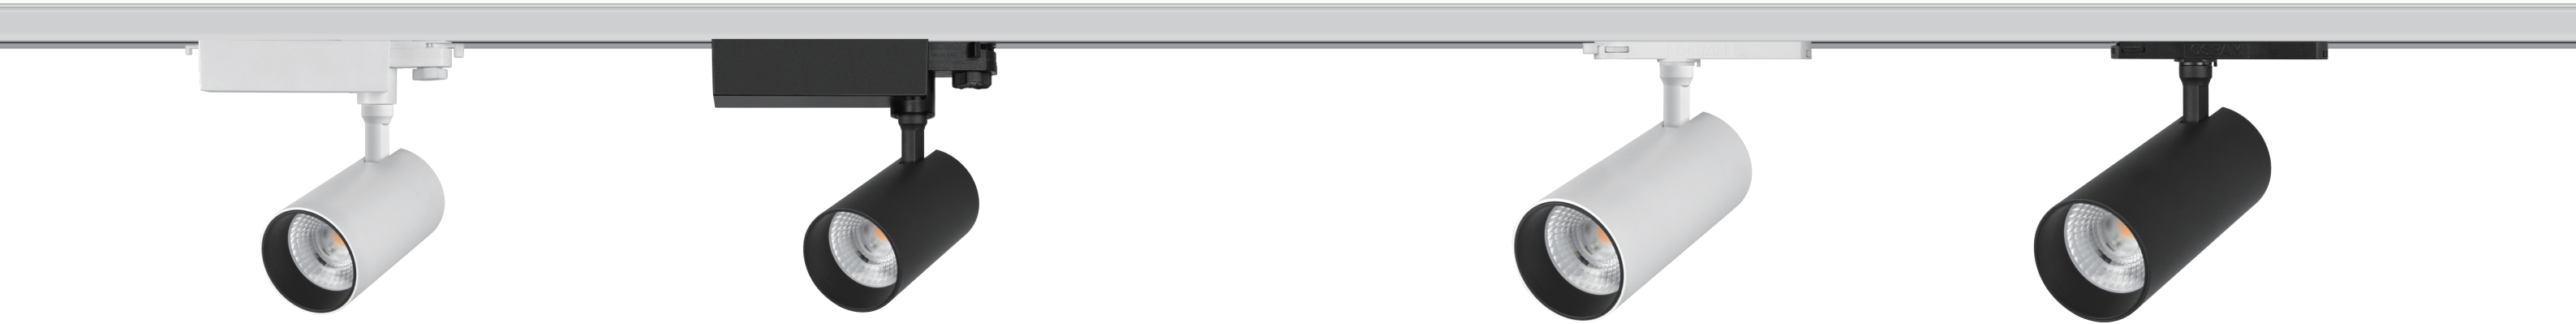

- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19

A B C

Optional


BJB holder

Optics changeable

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

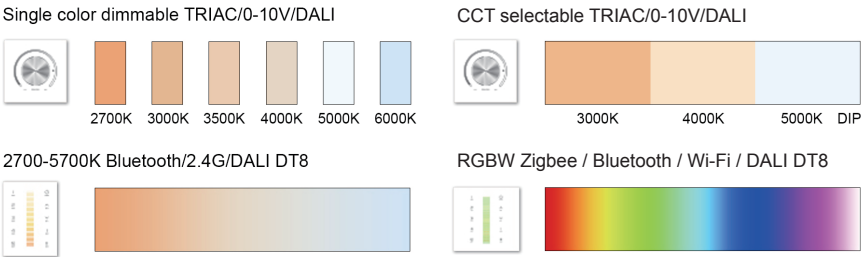

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WEO55	15W	φ55*L120mm	1400-1600lm	1300-1400lm	1100-1200lm	52x41x35cm (16 pcs/carton, 10.5kg)
GS-TL20WEO66	20W	φ66*L125mm	2100-2400lm	1900-2100lm	1700-2000lm	52x41x35cm (16 pcs/carton, 12.5kg)
GS-TL30WEO77	30W	φ77*L140mm	3200-3400lm	2700-3000lm	2500-2800lm	58X47X34cm (15 pcs/carton, 13.8kg)
GS-TL32WEO80	32W	φ80*L145mm	3300-3600lm	3000-3300lm	2800-3100lm	58X47X34cm (15 pcs/carton, 13.8kg)
GS-TL36WEO88	36W	φ88*L160mm	3700-4200lm	3400-3800lm	3200-3400lm	57X48X37cm (12 pcs/carton, 15.6kg)
GS-TL42WEO99	42W	φ99*L160mm	4300-4600lm	3900-4200lm	3600-3700lm	58X52X41cm (12 pcs/carton, 19.8kg)
GS-TL52WEO113	52W	φ113*L150mm	5200-5500lm	4800-5000lm	4400-4600lm	58X52X41cm (12 pcs/carton, 19.8kg)

SFL series

- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19

A B C

Optional


BJB holder

Optics changeable

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

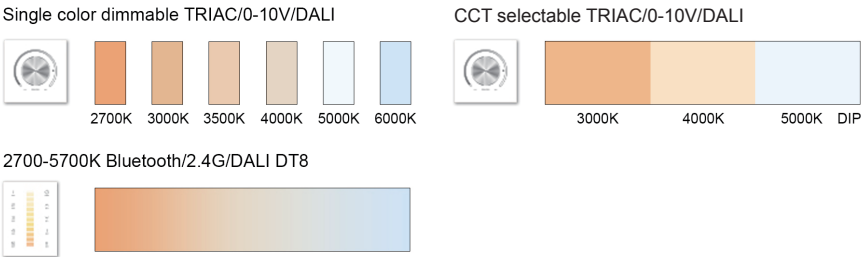


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20WLC55	20W	φ55*L150mm	2300-2400lm	2000-2100lm	1800-2000lm	52x41x35cm (16 pcs/carton, 12.8kg)
GS-TL30WLC66	30W	φ66*L160mm	3200-3400lm	2900-3200lm	2600-2800lm	52x41x35cm (16 pcs/carton, 15.5kg)
GS-TL36WLC77	36W	φ77*L170mm	3800-4200lm	3500-3800lm	3200-3400lm	58X47X43cm (15 pcs/carton, 16.8kg)
GS-TL42WLC88	42W	φ88*L175mm	4300-4600lm	3900-4200lm	3600-3700lm	57X48X37cm (12 pcs/carton, 15.5kg)

SFL series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19




Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Dimmable

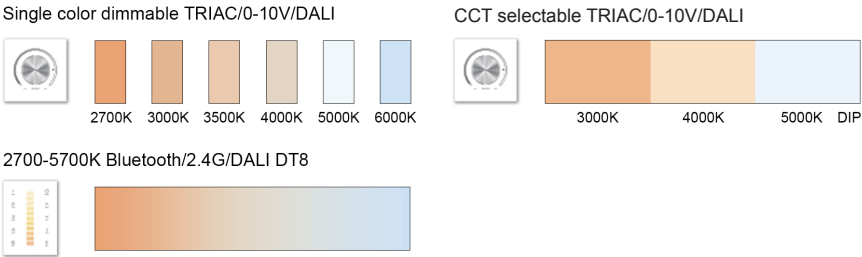


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20WLI66	20W	φ66*L160mm	2100-2400lm	1900-2100lm	1700-2000lm	44X29X33cm (20 pcs/carton, 17.5kg)
GS-TL25WLI77	25W	φ77*L170mm	2500-2800lm	2300-2600lm	2100-2300lm	50X30X39cm (20 pcs/carton, 20.8kg)
GS-TL36WLI88	36W	φ88*L175mm	3700-4200lm	3400-3800lm	3200-3400lm	56X31X33cm (15 pcs/carton, 15.3kg)

SFL series



- L / 15°/24°/36°/60° / UGR10-15
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR13-19




Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase



Dimmable

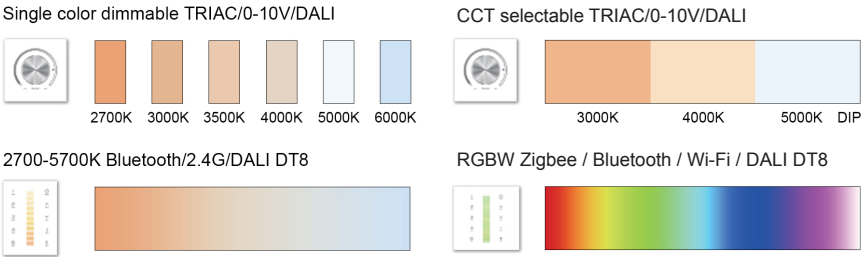

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20WLO55	20W	φ55*L150mm	2100-2400lm	1900-2100lm	1700-2000lm	52x41x35cm (16 pcs/carton, 12.8kg)
GS-TL30WLO66	30W	φ66*L160mm	3200-3400lm	2700-3000lm	2500-2800lm	52x41x35cm (16 pcs/carton, 12.5kg)
GS-TL36WLO77	36W	φ77*L170mm	3700-4200lm	3400-3800lm	3200-3400lm	58X47X34cm (15 pcs/carton, 16.8kg)
GS-TL42WLO88	42W	φ88*L175mm	4300-4600lm	3900-4200lm	3600-3700lm	57X48X37cm (12 pcs/carton, 17.8kg)

SFZ series



15°-60° Zoomable/ UGR12-15



A



C



Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700K

3000K

3500K

4000K

5000K

6000K

CCT selectable TRIAC/0-10V/DALI



3000K

4000K

5000K

DIP

2700-5700K Bluetooth/2.4G/DALI DT8



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WZI66	15W	φ66*L130mm	1200-1400lm	1000-1200lm	900-1000lm	40X26X35cm (20 pcs/carton, 15.8kg)
GS-TL20WZI77	20W	φ77*L150mm	1800-2000lm	1600-1800lm	1300-1400lm	58X47X43cm (15 pcs/carton, 13.8kg)
GS-TL32WZI88	32W	φ88*L168mm	3000-3400lm	2700-3000lm	2400-2700lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL36WZI99	36W	φ99*L185mm	3000-3400lm	3000-3200lm	2800-3000lm	56X31X33cm (15 pcs/carton, 14.5kg)

SFZ series



15°-60° Zoomable/ UGR12-15



A



C



Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700K

3000K

3500K

4000K

5000K

6000K

CCT selectable TRIAC/0-10V/DALI



3000K

4000K

5000K

DIP

2700-5700K Bluetooth/2.4G/DALI DT8



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL15WZC55	15W	φ55*L125mm	1300-1500lm	1100-1300lm	1000-1100lm	52x41x35cm (16 pcs/carton, 12.8kg)
GS-TL20WZC66	20W	φ66*L130mm	1600-1800lm	1500-1700lm	1300-1500lm	52x41x35cm (16 pcs/carton, 14.8kg)
GS-TL30WZC77	30W	φ77*L150mm	2700-3000lm	2500-2700lm	2400-2600lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL36WZC88	36W	φ88*L168mm	3400-3500lm	3200-3400lm	3000-3200lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL42WZC99	42W	φ99*L185mm	3600-4000lm	3400-3800lm	3200-3400lm	58X52X41cm (12 pcs/carton, 19.8kg)

SFC series



 Round/square/rectangle/triangle etc

  Anti-glare elements




Profile: 5°-20°/24°-36°/50°-60°/68°

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

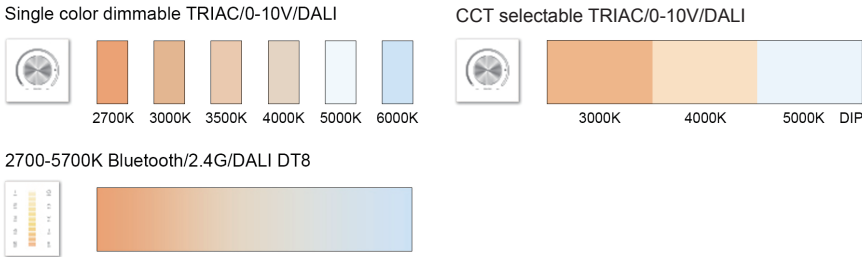

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL10WCC45A	10W	φ45*L155mm	300-350lm	250-300lm	200-250lm	58X41X28cm (8 pc/carton, 9kg)
GS-TL10WCC45B	10W	φ45*L120mm	300-350lm	250-300lm	200-250lm	58X41X28cm (8 pc/carton, 9kg)
GS-TL15WCC55A	15W	φ55*L195mm	450-500lm	400-450lm	350-400lm	58X41X28cm (8 pc/carton, 9kg)
GS-TL15WCC55B	15W	φ55*L170mm	450-500lm	400-450lm	350-400lm	58X41X28cm (8 pc/carton, 9kg)
GS-TL20WCC66	20W	φ66*L200mm	450-550lm	400-500lm	350-400lm	58X41X28cm (8 pc/carton, 9.8kg)
GS-TL32WCC88A	32W	φ88*L273mm	900-1100lm	800-1000lm	600-700lm	50X30X17cm (1 pc/carton, 3.1kg)
GS-TL32WCC88S	32W	φ88*L268mm	1200-1400lm	1100-1200lm	900-1000lm	50X30X17cm (1 pc/carton, 3.1kg)
GS-TL32WCC88W	32W	φ88*L268mm	900-1100lm	800-1000lm	600-700lm	50X30X17cm (1 pc/carton, 3.1kg)
GS-TL42WCC88	42W	φ99*L268mm	1200-1400lm	1100-1200lm	900-1000lm	50X30X17cm (1 pc/carton, 3.1kg)

SFN series




 L / 15°/24°/36°/60° / UGR10-15

 Y / 15°/24°/36°/60° / UGR13-19

 R / 30°/40°/60° / UGR13-19


 A  B  C



Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

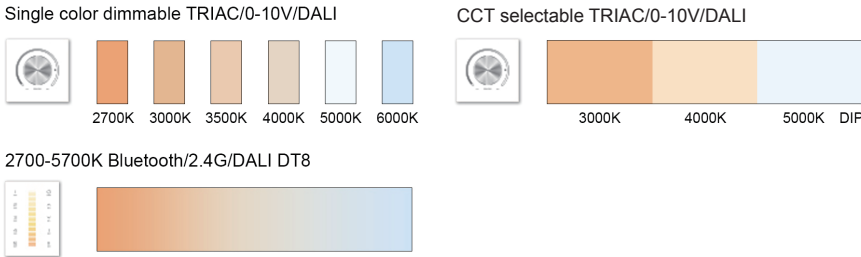


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL30WNC88	30W	φ88*L115mm	3200-3400lm	2700-3000lm	2500-2800lm	57x48x37cm (12 pcs/carton, 13.2kg)
GS-TL36WNC99	36W	φ99*L120mm	3700-4200lm	3400-3800lm	3200-3400lm	58x52x41cm (12 pcs/carton, 19.8kg)
GS-TL42WNC113	42W	φ113*L135mm	4300-4600lm	3900-4200lm	3600-3700lm	58X52X41cm (12 pcs/carton, 19.8kg)

UFE series

UFZ series



-  L / 15°/24°/36°/60° / UGR10-15
-  Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
-  R / 30°/40°/60° / UGR13-19




-  15°-60° Zoomable/ UGR12-15
-  A
-  C

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

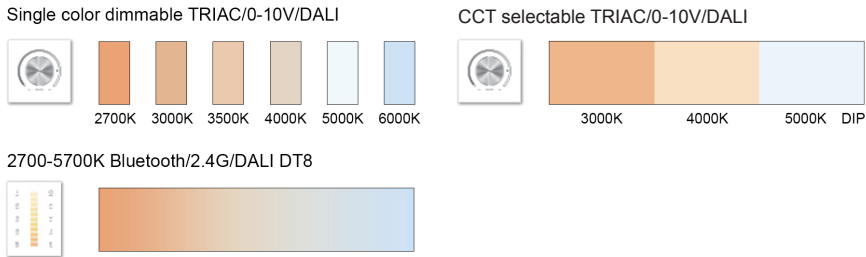


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20WU77	20W	φ77*L100mm	2100-2400lm	1900-2100lm	1700-2000lm	51X35X45cm (12 pcs/carton, 9.8kg)
GS-TL32WU88	32W	φ88*L115mm	3300-3600lm	3000-3300lm	2800-3100lm	56X40X28cm (8 pcs/carton, 13.5kg)
GS-TL42WU99	42W	φ99*L125mm	4300-4600lm	3900-4200lm	3600-3700lm	56X40X28cm (8 pcs/carton, 13.5kg)
GS-TL52WU113	52W	φ113*L150mm	5200-5500lm	4800-5000lm	4400-4600lm	60X45X34cm (8 pcs/carton, 15.8kg)

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

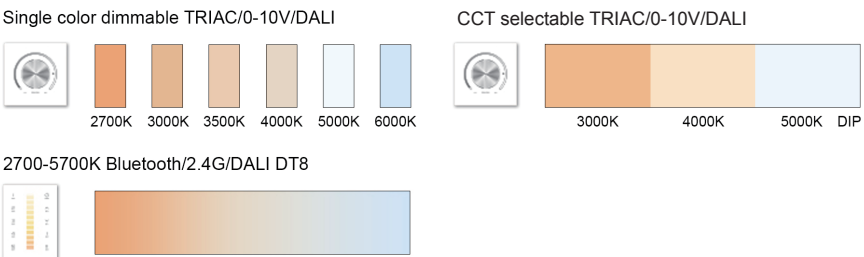


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20ZU77	20W	φ77*L130mm	1600-1800lm	1400-1600lm	1300-1400lm	58X47X43cm (15 pcs/carton, 13.8kg)
GS-TL32ZU88	32W	φ88*L135mm	3000-3400lm	2700-3000lm	2400-2700lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL42ZU99	42W	φ99*L157mm	3600-4000lm	3400-3800lm	3000-3400lm	58X52X41cm (12 pcs/carton, 19.8kg)

UFK series




- L / 15°/24°/36°/60° / UGR8-12
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR15-19



Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

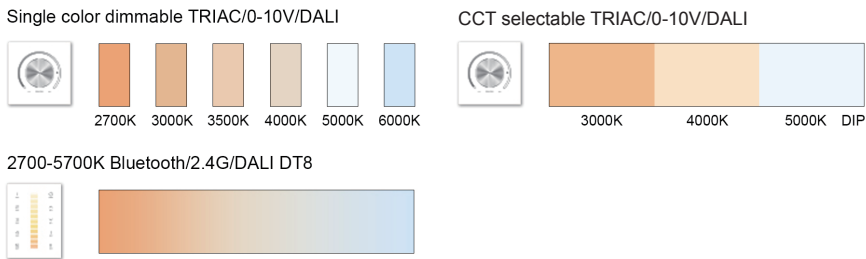

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL20WU75	20W	φ75*L90mm	2100-2400lm	1900-2100lm	1700-2000lm	51X35X45cm (12 pcs/carton, 9.8kg)
GS-TL32WU100	32W	φ100*L98mm	3300-3600lm	3000-3300lm	2800-3100lm	56X40X28cm (8 pcs/carton, 13.5kg)
GS-TL42WU100	42W	φ100*L98mm	4300-4600lm	3900-4200lm	3600-3700lm	56X40X28cm (8 pcs/carton, 13.5kg)
GS-TL52WU125	52W	φ125*L119mm	5200-5500lm	4800-5000lm	4400-4600lm	60X45X34cm (8 pcs/carton, 15.8kg)

UFB series




- L / 15°/24°/36°/60° / UGR8-12
- Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19
- R / 30°/40°/60° / UGR15-19



Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

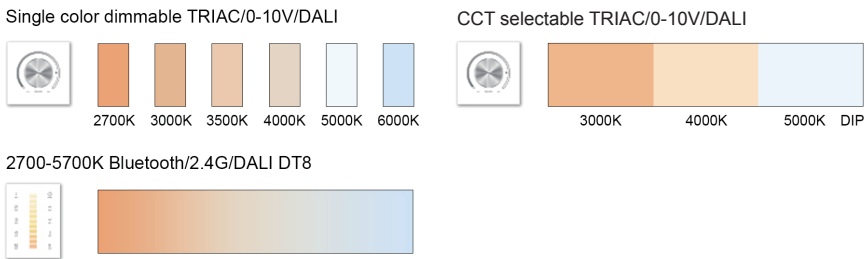

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL2x20WU77	40W	φ77*L100mm	4600-4800lm	4000-4200lm	3600-4000lm	51X35X45cm (8 pcs/carton, 12.4kg)
GS-TL2x32WU99	64W	φ99*L125mm	6800-7400lm	6000-6600lm	5400-6000lm	61X55X30cm (8 pcs/carton, 14.5kg)
GS-TL2x42WU99	84W	φ99*L125mm	8800-9600lm	8200-8600lm	6800-7400lm	61X55X30cm (8 pcs/carton, 14.5kg)

UFD series

MFE series



L / 15°/24°/36°/60° / UGR8-12

Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19

R / 30°/40°/60° / UGR15-19

A B C

Optional

BJB holder

Optics changable



L / 15°/24°/36°/60° / UGR12-15

Y / 17°/24°/30°/40°/45°/50°/60° / UGR13-19

R / 30°/40°/60° / UGR15-19

A B C

Optional


BJB holder

Optics changable

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

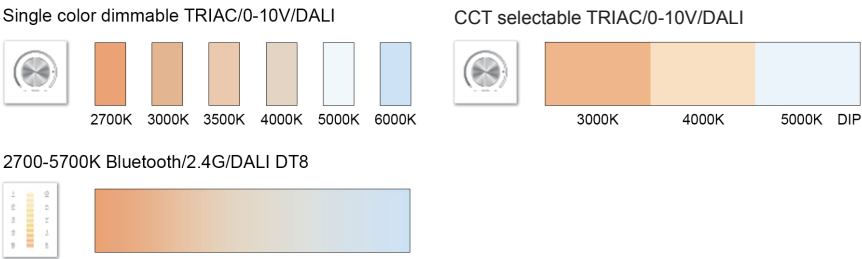


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL2x20WU75	42W	φ75*L90mm	4600-4800lm	4000-4200lm	3600-4000lm	51X35X45cm (8 pcs/carton, 12.4kg)
GS-TL2x32WU100	64W	φ100*L98mm	6800-7400lm	6000-6600lm	5400-6000lm	61X55X30cm (8 pcs/carton, 14.5kg)
GS-TL2x42WSU100	84W	φ100*L98mm	8800-9600lm	8200-8600lm	6800-7400lm	61X55X30cm (8 pcs/carton, 14.5kg)
GS-TL2x52WU125	104W	φ125*L119mm	10400-11000lm	9600-10000lm	8800-9200lm	71X60X34cm (8 pcs/carton, 18.8kg)

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

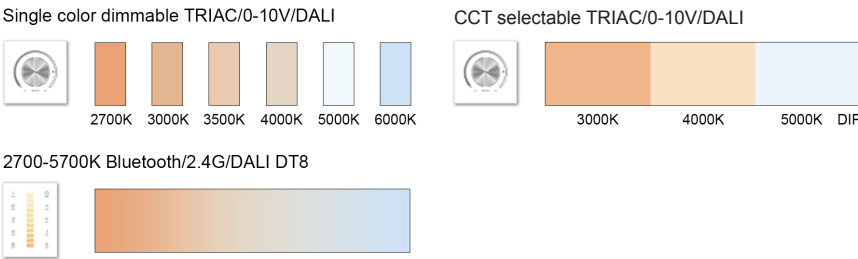

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL36WMC88	36W	φ88*L160mm	3700-4200lm	3400-3800lm	3200-3400lm	57X48X37cm (12 pcs/carton, 13.2kg)
GS-TL42WMC99	42W	φ99*L160mm	4300-4600lm	3900-4200lm	3600-3700lm	58X52X41cm (12 pcs/carton, 19.8kg)
GS-TL32WMI88	32W	φ88*L160mm	3300-3600lm	3000-3300lm	2800-3100lm	56X31X33cm (15 pcs/carton, 15.3kg)
GS-TL40WMI99	40W	φ99*L160mm	3800-4200lm	3400-3700lm	3200-3400lm	57X48X37cm (12 pcs/carton, 13.2kg)


MFZ series



MFA series




 15°-60° Zoomable/ UGR12-15



Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

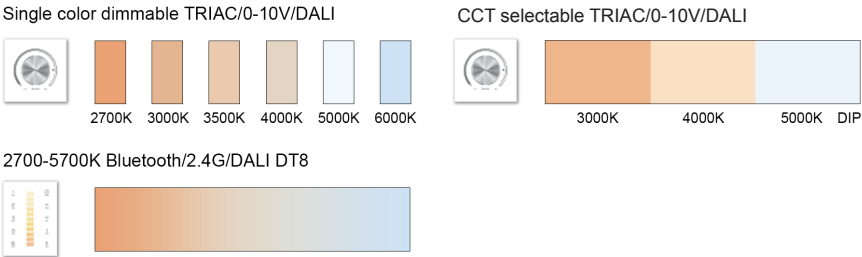


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL36WZMC88	36W	φ88*L168mm	3400-3500lm	3200-3400lm	3000-3200lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL42WZMC99	42W	φ99*L185mm	3600-4000lm	3400-3800lm	3200-3400lm	58X52X41cm (12 pcs/carton, 19.8kg)
GS-TL32WZMI88	32W	φ88*L168mm	3000-3400lm	2700-3000lm	2400-2700lm	56X31X33cm (15 pcs/carton, 14.5kg)
GS-TL36WZMI99	36W	φ99*L185mm	3400-3500lm	3000-3200lm	2800-3000lm	56X31X33cm (15 pcs/carton, 14.5kg)

Product parameters


- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase(4-wire)

Dimmable

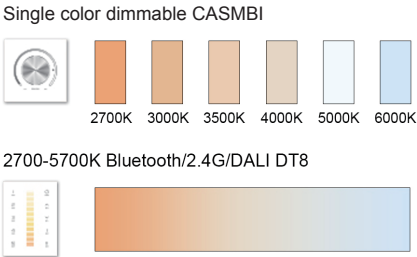

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-TL32WA108	32W	φ108*L138mm	3300-3600lm	3000-3300lm	2800-3100lm
GS-TL32WAZ108	32W	φ108*L138mm	2700-3000lm	2500-2800lm	2200-2400lm

TFM series




12°/24°/36°/50°/50°*50°/
75°*75°/35°*75°/90°*90°

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

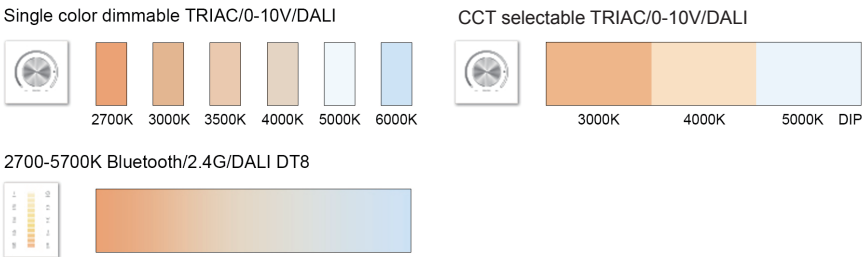

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL35WMC136	35W	136*136*50mm	3100-3500lm	2900-3200lm	2600-2900lm	45X37X32cm (12 pcs/carton, 11.8kg)
GS-TL35WMTU136	35W	136*136*50mm	3100-3500lm	2900-3200lm	2600-2900lm	53X52X33cm (12 pcs/carton, 16.8kg)


TFS series



Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years
Adapter : 3/single phase

Dimmable

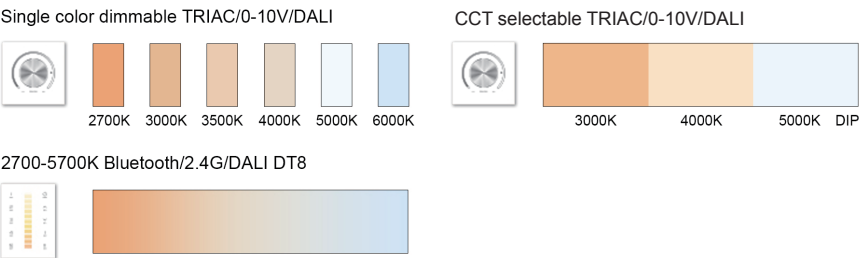

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-TL20WLD60	20W	L600*W31*H48mm	1800-2000lm	1600-1800lm	no
GS-TL28WLD80	28W	L800*W31*H48mm	2500-2800lm	2200-2400lm	no
GS-TL32WLD100	32W	L1000*W31*H48mm	2900-3200lm	2500-2700lm	no
GS-TL36WLD120	36W	L1200*W31*H48mm	3600-4000lm	3200-3600lm	no
GS-TL15WLT56	15W	L558*W68*H38mm	1500-1700lm	1300-1500lm	no
GS-TL30WLT109	30W	L1090*W68*H38mm	3000-3400lm	2600-3000lm	no
GS-TL2*15WLT56	30W	L558*W125*H38mm	3000-3400lm	2600-3000lm	no
GS-TL2*30WLT109	60W	L1090*W125*H38mm	5800-6400lm	5000-5400lm	no
GS-TL40WLT56	40W	L558*W125*H55mm	3900-4200lm	3500-3700lm	no
GS-TL85WLT109	85W	L1090*W125*H55mm	8300-8800lm	7500-7900lm	no

TFS series



TFS series




12°/36°/48°

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

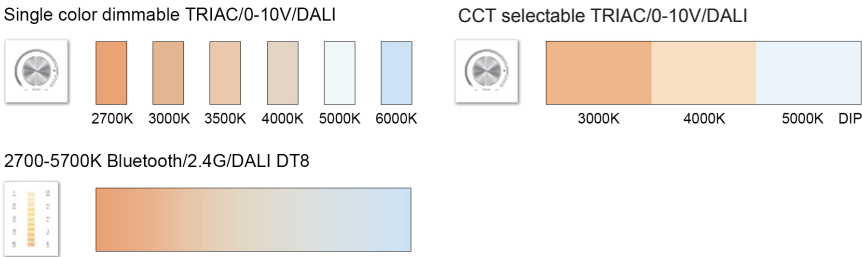

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL14WLC43	14W	43*40*L164mm	1000-1200lm	900-1000lm	no	69X47X31cm (18 pcs/carton, 13.5kg)
GS-TL23WLC43	23W	43*40*L243mm	1500-1600lm	1300-1500lm	no	69X47X31cm (12 pcs/carton, 11.4kg)
GS-TL32WLC43	32W	43*40*L323mm	2200-2500lm	1900-2100lm	no	69X47X31cm (9 pcs/carton, 9.8kg)




12°/36°/48°

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years
- Adapter : 3/single phase

Dimmable

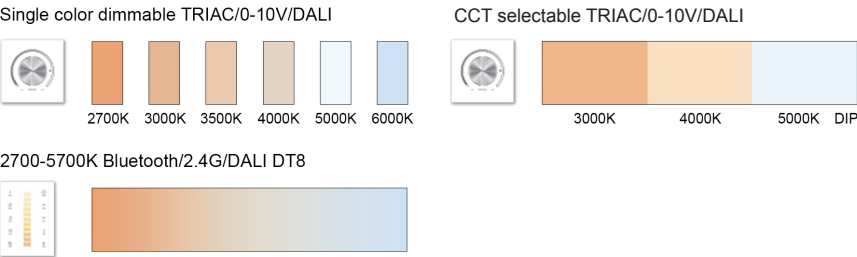

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-TL14WLO43	14W	43*40*L164mm	1000-1200lm	900-1000lm	no	69X47X31cm (18 pcs/carton, 13.8kg)
GS-TL23WLO43	23W	43*40*L243mm	1500-1600lm	1300-1500lm	no	69X47X31cm (12 pcs/carton, 12.5kg)
GS-TL32WLO43	32W	43*40*L323mm	2200-2500lm	1900-2100lm	no	56X31X33cm (9 pcs/carton, 10.2kg)


ACS series



RF2.4G remote controller
for CCT 2700K-5700K
dimmable



RF2.4G remote controller
for RGB



Control panel for CCT
2700K-5700K dimmable



Control panel for RGB



Wi-Fi controller

Track rail system:


GLOBAL ^{track}

uni**pro**


POWERGEAR[®]
王牌路軌

GS-TL01


Surface mounted(or pendant) series




Single phase(2 wires)



Single phase(3 wires)




3 phase(4 wires)




3 phase(6 wires) DALI sys


Recessed series



Single phase(3 wires)



3 phase(4 wires)



3 phase(6 wires) DALI sys

Connectors:



GS-TL02



GS-TL03




GS-TL04



GS-TL05



GS-TL06



GS-TL07



GS-TL08

Suspended:



GS-TL09