


RECESSED DOWNLIGHT SERIES

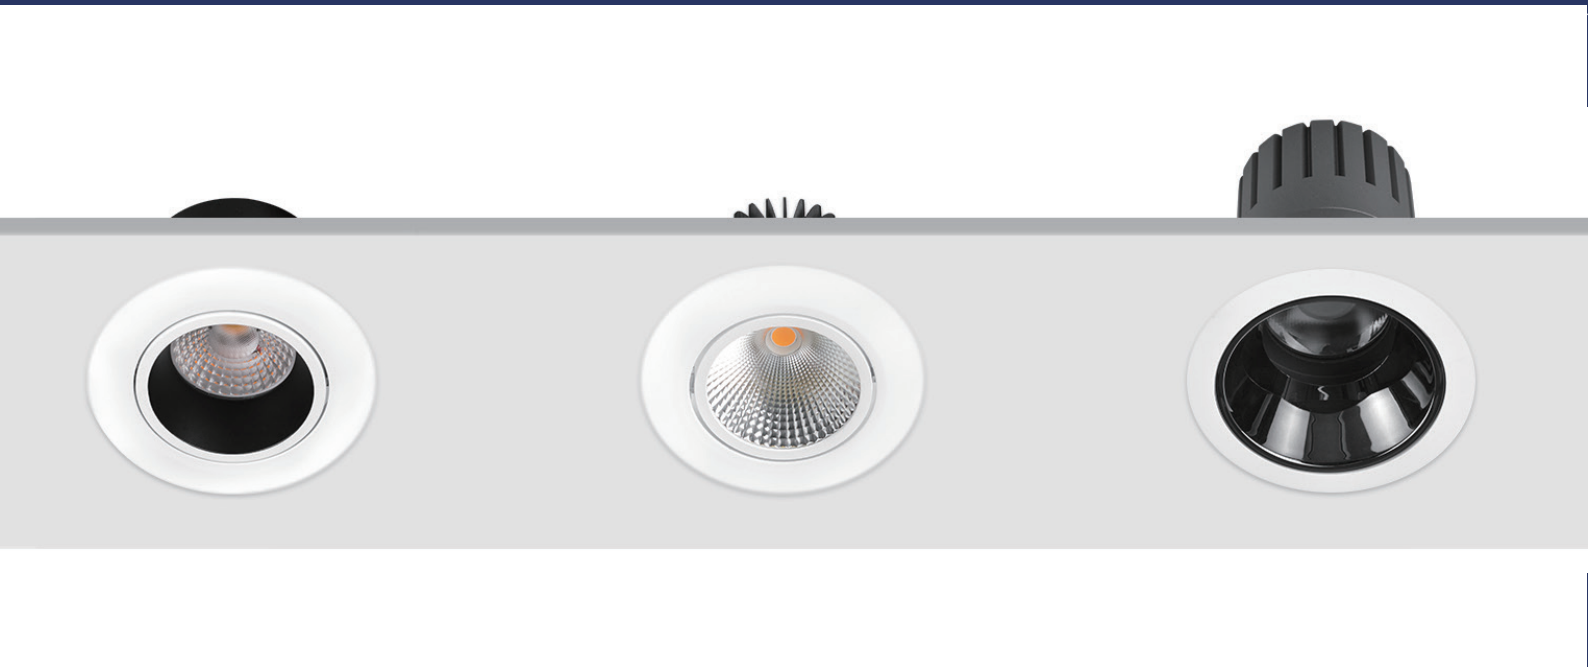

CONTENTS

ADL SERIES P53

NDL SERIES P62

RDL SERIES P54

TDL SERIES P63

HDL SERIES P55

FDL SERIES P64

ODL SERIES P56

LNS SERIES P65

ODLZ SERIES P57

GDL SERIES P66

ZGL SERIES P58

SDL SERIES P67-68

ZGN SERIES P59

MDL SERIES P69

ZGM SERIES P60

LDL SERIES P70

WDL SERIES P61

ADL series




Product parameters

- Anti-glare : UGR 8-12
- Beam angle : 15°/24°/36°/60°
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years



Dimmable

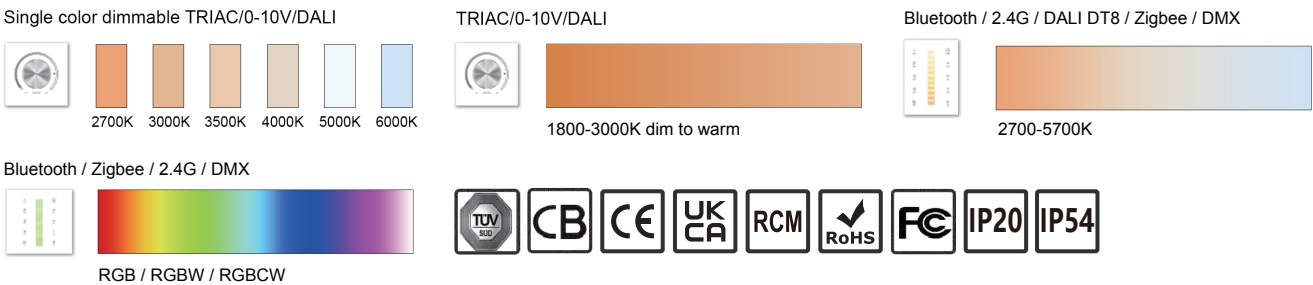

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WA77	8W	φ77*H65mm (cutout:φ68-72mm)	no	680-750lm	600-650lm	49X39X38cm (36 pcs/carton, 14.8kg)
GS-CL10WA88	10W	φ88*H65mm (cutout:φ75-80mm)	no	900-1000lm	800-900lm	49X39X38cm (36 pcs/carton, 15.8kg)
GS-CL15WA88	15W	φ88*H80mm (cutout:φ75-80mm)	1300-1500lm	1200-1400lm	1000-1100lm	49X39X38cm (36 pcs/carton, 19.8kg)
GS-CL15WA110	15W	φ110*H80mm (cutout:φ95-100mm)	1300-1500lm	1200-1400lm	1000-1100lm	50X34X41cm (18 pcs/carton, 13.8kg)
GS-CL20WA145	20W	φ145*H105mm (cutout:φ118-132mm)	2200-2400lm	2000-2200lm	1900-2000lm	50X34X41cm (18 pcs/carton, 13.8kg)
GS-CL32WA170	32W	φ170*H120mm (cutout:φ145-155mm)	3200-3400lm	3000-3200lm	2800-3200lm	57X39X45cm (18 pcs/carton, 18.7kg)
GS-CL42WR200	42W	φ200*H130mm (cutout:φ162-180mm)	4200-4400lm	3800-4000lm	3400-3600lm	45X45X50cm (12 pcs/carton, 15.3kg)
GS-CL52WR250	52W	φ250*H126mm (cutout:φ205-230mm)	5200-5500lm	4900-5200lm	4500-4800lm	54X53X34cm (8 pcs/carton, 16.8kg)

RDL series




Product parameters

- Anti-glare : UGR 17-25/15-18
- Beam angle : 15°/24°/30°/40°/60°
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years



Dimmable

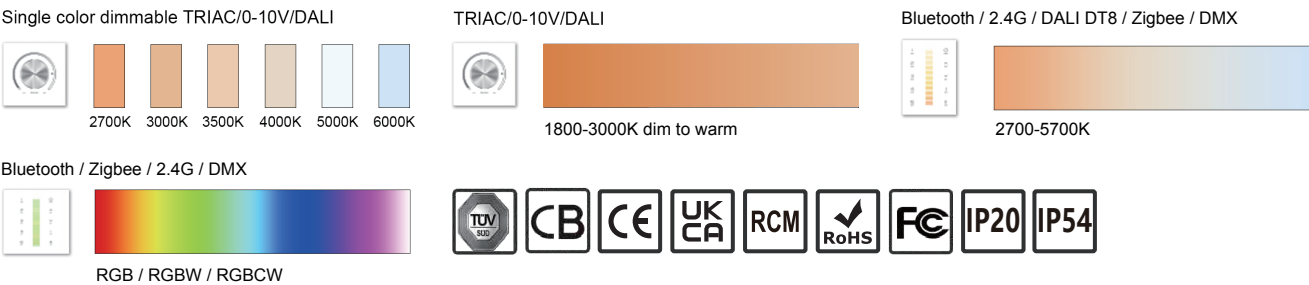

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL10WR96U	10W	φ96*H50mm (cutout:φ75-80mm)	1000-1100lm	900-1000lm	800-900lm	49X39X38cm (36 pcs/carton, 15.8kg)
GS-CL8WR77	8W	φ77*H60mm (cutout:φ68-72mm)	750-850lm	700-750lm	650-700lm	49X39X38cm (36 pcs/carton, 14.2kg)
GS-CL8WR96	8W	φ96(88)*H65mm (cutout:φ75-80mm)	750-850lm	700-750lm	650-700lm	49X39X38cm (36 pcs/carton, 14.8kg)
GS-CL15WR96	15W	φ96(88)*H78mm (cutout:φ75-80mm)	1400-1500lm	1200-1300lm	1000-1100lm	49X39X42cm (36 pcs/carton, 17.8kg)
GS-CL15WR120	15W	φ120(110)*H80mm (cutout:φ95-108mm)	1400-1500lm	1200-1300lm	1000-1100lm	42X42X34cm (27 pcs/carton, 14.8kg)
GS-CL20WR145	20W	φ145*H105mm (cutout:φ118-132mm)	2200-2400lm	2000-2200lm	1900-2000lm	50X34X41cm (18 pcs/carton, 13.8kg)
GS-CL32WR170	32W	φ170*H120mm (cutout:φ145-155mm)	3200-3500lm	2900-3200lm	2500-2700lm	57X39X45cm (18 pcs/carton, 18.7kg)
GS-CL42WR200	42W	φ200*H130mm (cutout:φ162-180mm)	4000-4300lm	3700-4000lm	3200-3500lm	45X45X50cm (12 pcs/carton, 15.3kg)
GS-CL52WR250	52W	φ250*H126mm (cutout:φ205-230mm)	5200-5500lm	4900-5200lm	4500-4800lm	54X53X34cm (8 pcs/carton, 16.8kg)
GS-CL72WR250	72W	φ250*H140mm (cutout:φ205-230mm)	6500-7000lm	5900-6500lm	5500-5800lm	56X56X38cm (8 pcs/carton, 19.8kg)
GS-CL90WR250	90W	φ250*H160mm (cutout:φ205-230mm)	7500-8000lm	7000-7500lm	6500-7000lm	56X56X38cm (8 pcs/carton, 21.8kg)

HDL series






Product parameters

Anti-glare : UGR 17-21
Beam angle : 15°/24°/30°/40°/60°(Lens/Reflector)
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

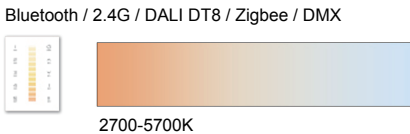

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL32WH198	32W	φ198*H170mm (cutout:φ165-185mm)	3200-3500lm	2900-3200lm	2500-2700lm	45X45X44cm (8 pcs/carton, 14.5kg)
GS-CL52WH198	52W	φ198*H125mm (cutout:φ165-185mm)	5200-5500lm	4900-5200lm	4500-4800lm	45X45X44cm (8 pcs/carton, 15.8kg)
GS-CL90WH198	90W	φ198*H165mm (cutout:φ165-185mm)	7500-8000lm	7000-7500lm	6500-7000lm	56X56X38cm (8 pcs/carton, 21.8kg)

ODL series






Product parameters

Anti-glare : UGR 17-21
Beam angle : 15°/24°/40°/60°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WO90	8W	φ90*H60mm (cutout:φ75-80mm)	750-850lm	700-750lm	650-700lm	49X39X38cm (36 pcs/carton, 13.8kg)
GS-CL15WO102	15W	φ102*H80mm (cutout:φ90-96mm)	1400-1500lm	1200-1300lm	1000-1100lm	50X27X31cm (24 pcs/carton, 10.8kg)
GS-CL20WO125	20W	φ125*H108mm (cutout:φ110-118mm)	2200-2400lm	2000-2200lm	1900-2000lm	42X42X34cm (27 pcs/carton, 14.8kg)
GS-CL28WO140	28W	φ140*H115mm (cutout:φ125-130mm)	2700-3000lm	2500-2700lm	2200-2500lm	51X35X51cm (18 pcs/carton, 17.2kg)
GS-CL32WO160	32W	φ160*H135mm (cutout:φ145-153mm)	3200-3500lm	2900-3200lm	2500-2700lm	59X40X47cm (18 pcs/carton, 22.9kg)
GS-CL42WO190	42W	φ190*H167mm (cutout:φ175-183mm)	4200-4300lm	3800-4000lm	3400-3600lm	44X44X43cm (8 pcs/carton, 14.8kg)
GS-CL52WO190	52W	φ190*H167mm (cutout:φ175-183mm)	5200-5500lm	4900-5200lm	4500-4800lm	44X44X43cm (8 pcs/carton, 14.8kg)
GS-CL52WO200	52W	φ200*H166mm (cutout:φ184-190mm)	5200-5500lm	4900-5200lm	4500-4800lm	44X44X43cm (8 pcs/carton, 15.8kg)

ODLZ series



Product parameters


Anti-glare : UGR 17-21
Beam angle : 15°-60° zoomable
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



15° – 60° Zoomable/UGR 17–21

Dimmable


Single color dimmable TRIAC/0-10V/DALI



TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL20WOZ125	20W	φ125*H108mm (cutout:φ110-118mm)	2200-2400lm	2000-2200lm	1900-2000lm	42X42X34cm (27 pcs/carton, 14.8kg)
GS-CL28WOZ140	28W	φ140*H115mm (cutout:φ125-130mm)	no	3000-3200lm	no	50X35X51cm (18 pcs/carton, 17.2kg)
GS-CL32WOZ160	32W	φ160*H135mm (cutout:φ145-153mm)	3200-3500lm	2900-3200lm	2500-2700lm	59X40X47cm (18 pcs/carton, 22.9kg)
GS-CL42WOZ190	42W	φ190*H167mm (cutout:φ175-183mm)	4200-4400lm	3800-4000lm	3400-3600lm	44X44X43cm (8 pcs/carton, 14.8kg)

ZGL series



Product parameters

Anti-glare : UGR 8-11
Beam angle : 15°/24°/36°/50°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



R1



R2



R3



R4



S1



S2




S3



S4

Dimmable


Single color dimmable TRIAC/0-10V/DALI



TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WZ68	8W	φ65*H78mm (cutout:φ55mm)	750-800lm	700-750lm	600-650lm	33X32X33cm (36 pcs/carton, 10.8kg)
GS-CL15WZ84	15W	φ86*H105mm (cutout:φ75mm)	1400-1600lm	1250-1400lm	1100-1300lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL20WZ84	20W	φ86*H125mm (cutout:φ75mm)	1400-1600lm	1250-1400lm	1100-1300lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL20WZ110	20W	φ113*H125mm (cutout:φ100mm)	1900-2200lm	1700-1900lm	1500-1600lm	40X32X39cm (18 pcs/carton, 9.8kg)
GS-CL32WZ142	32W	φ142*H153mm (cutout:φ125-132mm)	2200-2400lm	2000-2200lm	1800-2000lm	49X33X36cm (12 pcs/carton, 14.8kg)
GS-CL42WZ165	42W	φ165*H178mm (cutout:φ150-158mm)	2800-3000lm	2600-2800lm	2200-2600lm	44X43X44cm (8 pcs/carton, 14.8kg)

ZGN series




Product parameters

Anti-glare	: UGR 8-11
Beam angle	: 15°/24°/36°/50°
Input voltage	: 200-240vAC/100-277vAC
Power factor	: PF>0.9
SDCM	: <3
Color of frame	: white/black/customed
Flicker Free	: 0.002
Life span	: 50,000 hrs
Warranty	: 5 years



Dimmable


Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WZN61	8W	φ61*H50mm (cutout:φ55mm)	650-750lm	550-650lm	480-550lm	33X32X33cm (36 pcs/carton, 10.8kg)
GS-CL15WZN82	15W	φ82*H62mm (cutout:φ75mm)	1200-1400lm	1000-1200lm	900-1000lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL8WZN64	8W	φ64*H69mm (cutout:φ55mm)	700-800lm	600-700lm	500-600lm	33X32X33cm (36 pcs/carton, 10.8kg)
GS-CL15WZN64	15W	φ64*H110mm (cutout:φ55mm)	1200-1400lm	1000-1200lm	900-1000lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL15WZN84	15W	φ84*H95mm (cutout:φ75mm)	1400-1600lm	1200-1400lm	1100-1300lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL20WZN84	20W	φ84*H116mm (cutout:φ75mm)	1900-2200lm	1700-1900lm	1500-1600lm	40X40X38cm (36 pcs/carton, 12.8kg)

ZGM series




Product parameters

Anti-glare	: UGR 8-11/10-12
Beam angle	: 15°/24°/36°/50°
Input voltage	: 200-240vAC/100-277vAC
Power factor	: PF>0.9
SDCM	: <3
Color of frame	: white/black/customed
Flicker Free	: 0.002
Life span	: 50,000 hrs
Warranty	: 5 years



Dimmable


Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL4WZM40	4W	φ40*H31mm (cutout:φ35mm)	no	240-280lm	200-240lm	\
GS-CL4WZM50	4W	φ50*H61mm (cutout:φ43mm)	no	240-280lm	200-240lm	\
GS-CL6WZM58	6W	φ58*H74mm (cutout:φ53mm)	no	360-400lm	300-360lm	33X32X33cm (36 pcs/carton, 10.8kg)
GS-CL8WZM68	8W	φ68*H90mm (cutout:φ62-65mm)	no	600-640lm	560-600lm	33X32X33cm (36 pcs/carton, 10.8kg)
GS-CL15WZM85	15W	φ85*H110mm (cutout:φ75-80mm)	1400-1600lm	1250-1400lm	1100-1300lm	40X40X38cm (36 pcs/carton, 12.8kg)
GS-CL20WZM85	20W	φ85*H150mm (cutout:φ75-80mm)	1900-2200lm	1700-1900lm	1500-1600lm	40X40X42cm (36 pcs/carton, 16.8kg)

WDL series

IP65


Product parameters

Anti-glare : UGR 10-12
Beam angle : 15°/24°/36°/60°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WW86	8W	φ86*H54mm (cutout:φ75-80mm)	750-850lm	700-750lm	650-700lm	32X32X34cm (27 pcs/carton, 8.5kg)
GS-CL15WW86	15W	φ86*H54mm (cutout:φ75-80mm)	1300-1500lm	1200-1400lm	1100-1200lm	32X32X34cm (27 pcs/carton, 8.5kg)
GS-CL15WW100	15W	φ100*H64mm (cutout:φ90-95mm)	1300-1500lm	1200-1400lm	1100-1200lm	32X32X34cm (27 pcs/carton, 8.5kg)
GS-CL20WW136	20W	φ136*H83mm (cutout:φ125-130mm)	2100-2300lm	1900-2000lm	1700-1800lm	37X31X31cm (12 pcs/carton, 9.8kg)
GS-CL32WW158	32W	φ158*H96mm (cutout:φ145-150mm)	3000-3400lm	2700-2900lm	2400-2600lm	57X39X45cm (18 pcs/carton, 19.3kg)
GS-CL42WW180	42W	φ180*H109mm (cutout:φ165-170mm)	3600-4000lm	3300-3600lm	3100-3300lm	42X42X40cm (12 pcs/carton, 14.8kg)

NDL series


Product parameters

Beam angle : 90°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL6WN100	6W	φ100*H42mm (cutout:φ70-85mm)	400-450lm	350-400lm	no	35x35x33cm (27 pcs/carton, 8.8kg)
GS-CL8WN106	8W	φ106*H42mm (cutout:φ80-95mm)	550-600lm	500-550lm	no	40x40x33cm (27 pcs/carton, 9.8kg)
GS-CL12WN115	12W	φ115*H46mm (cutout:φ90-105mm)	800-1000lm	700-900lm	no	41X41X36cm (27 pcs/carton, 10.8kg)
GS-CL15WN143	15W	φ143*H46mm (cutout:φ110-130mm)	1000-1200lm	900-1000lm	no	52x35x42cm (18 pcs/carton, 9.3kg)
GS-CL20WN180	20W	φ180*H55mm (cutout:φ145-160mm)	1700-1900lm	1500-1700lm	no	57X42X39cm (30 pcs/carton, 16.8kg)
GS-CL20WN190	20W	φ190*H60mm (cutout:φ160-175mm)	1700-1900lm	1500-1700lm	no	59X40X46cm (18 pcs/carton, 11.8kg)
GS-CL32WN230	32W	φ230*H65mm (cutout:φ190-210mm)	2500-2800lm	2300-2500lm	no	65X27X52cm (10 pcs/carton, 7.5kg)

TDL series




Product parameters

Beam angle : 90°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



FDL series

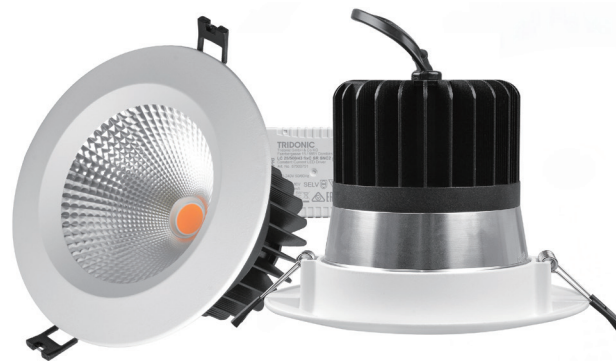


Product parameters

Anti-glare : UGR L10-11 R15-19
Beam angle : L15°/24°/36°/60° R24°/40°/60°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years




Dimmable


Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX




Bluetooth / Zigbee / 2.4G / DMX




Dimmable


Single color dimmable TRIAC/0-10V/DALI




TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL6WT80	6W	φ85*H38mm (cutout:φ68-75mm)	500-600lm	450-500lm	no	35x35x33cm (27 pcs/carton, 8.8kg)
GS-CL12WT108	12W	φ108*H42mm (cutout:φ85-95mm)	1000-1200lm	900-1100lm	no	40x40x33cm (27 pcs/carton, 9.8kg)
GS-CL15WT140	15W	φ140*H45mm (cutout:φ120-130mm)	1400-1600lm	1250-1450lm	no	52x35x42cm (18 pcs/carton, 9.3kg)
GS-CL20WT168	20W	φ168*H45mm (cutout:φ150-160mm)	1900-2200lm	1700-1900lm	no	57x42x39cm (30 pcs/carton, 16.8kg)
GS-CL24WT190	24W	φ190*H45mm (cutout:φ155-170mm)	2200-2500lm	2000-2200lm	no	59x40x46cm (18 pcs/carton, 11.8kg)
GS-CL32WT225	32W	φ225*H47mm (cutout:φ195-208mm)	3000-3500lm	2700-3000lm	no	65x27x52cm (10 pcs/carton, 7.5kg)

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WF96	8W	φ96*H65mm (cutout:φ75-86mm)	750-850lm	700-750lm	650-700lm	49X39X38cm (36 pcs/carton, 15.8kg)
GS-CL15WF96	15W	φ96*H78mm (cutout:φ75-86mm)	1400-1500lm	1200-1300lm	1000-1100lm	49X38X42cm (36 pcs/carton, 17.8kg)
GS-CL15WF120	15W	φ120*H80mm (cutout:φ95-108mm)	1400-1500lm	1200-1300lm	1000-1100lm	42X42X34cm (27 pcs/carton, 14.8kg)
GS-CL20WF145	20W	φ145*H105mm (cutout:φ118-132mm)	2200-2400lm	2000-2200lm	1900-2000lm	50X34X41cm (18 pcs/carton, 13.8kg)
GS-CL32WF170	32W	φ170*H120mm (cutout:φ142-155mm)	3200-3500lm	2900-3200lm	2500-2700lm	57X39X45cm (18 pcs/carton, 19.3kg)
GS-CL42WF200	42W	φ200*H130mm (cutout:φ162-180mm)	4000-4300lm	3700-4000lm	3200-3500lm	45X45X50cm (12 pcs/carton, 15.3kg)
GS-CL52WF230	52W	φ230*H126mm (cutout:φ200-215mm)	5200-5500lm	4900-5200lm	4500-4800lm	54X53X34cm (8 pcs/carton, 16.8kg)
GS-CL72WF230	72W	φ230*H140mm (cutout:φ200-215mm)	6500-7000lm	5900-6500lm	5500-5800lm	56X56X38cm (8 pcs/carton, 19.8kg)
GS-CL90WF230	90W	φ230*H165mm (cutout:φ200-215mm)	7500-8000lm	7000-7500lm	6500-7000lm	56X56X38cm (8 pcs/carton, 21.8kg)

LNS series

Product parameters

Anti-glare : UGR 6-8
Beam angle : 15°/24°/36°/48°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



GDL series


Product parameters

Anti-glare : UGR 12-17
Beam angle : 15°/24°/36°/60°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable


Single color dimmable TRIAC/0-10V/DALI



TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX




Bluetooth / Zigbee / 2.4G / DMX



Dimmable


Single color dimmable TRIAC/0-10V/DALI



TRIAC/0-10V/DALI



Bluetooth / 2.4G / DALI DT8 / Zigbee / DMX



Bluetooth / Zigbee / 2.4G / DMX



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL2WL45	2W	45x45x49mm (cutout:37x37mm)	160-180lm	140-160lm	no	58X40X38cm (50 pcs/carton, 10.8kg)
GS-CL5WL75	5W	75x45x49mm (cutout:68x37mm)	320-360lm	280-320lm	no	58X40X38cm (32 pcs/carton, 9.8kg)
GS-CL10WL147	10W	147x45x49mm (cutout:140x37mm)	700-800lm	650-750lm	no	65X49X43cm (32 pcs/carton, 14.8kg)
GS-CL20WL280	20W	280x45x49mm (cutout:273x37mm)	1600-1800lm	1400-1600lm	no	48x38x39cm (30 pcs/carton, 18.8kg)
GS-CL30WL412	30W	413x45x49mm (cutout:405x37mm)	2200-2400lm	1800-2000lm	no	48x35x39cm (15 pcs/carton, 13.8kg)
GS-CL10WL133	10W	133x60x26mm (cutout:126x47mm)	800-900lm	700-800lm	no	48x35x39cm (15 pcs/carton, 13.8kg)
GS-CL20WL200	20W	200x200x26mm (cutout:190x190mm)	1600-1800lm	1400-1600lm	no	48x35x39cm (15 pcs/carton, 13.8kg)
GS-CL20WL360	20W	360x60x26mm (cutout:350x47mm)	1600-1800lm	1400-1600lm	no	48x35x39cm (15 pcs/carton, 13.8kg)
GS-CL40WL360	40W	360x150x26mm (cutout:343x140mm)	3200-3600lm	2800-3200lm	no	48x35x39cm (15 pcs/carton, 13.8kg)

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-CL12WG130	12W	φ130*H130mm (cutout:110*110mm)	1400-1500lm	1200-1300lm	1000-1100lm
GS-CL2*12WG130	2*12W	φ225*H130mm (cutout:205*110mm)	2800-3000lm	2400-2600lm	2000-2200lm
GS-CL3*12WG130	3*12W	φ305*H130mm (cutout:285*110mm)	4200-4500lm	3600-3900lm	3000-3300lm
GS-CL20WG145	20W	φ145*H145mm (cutout:125*125mm)	2200-2400lm	2000-2200lm	1900-2000lm
GS-CL2*20WG145	2*20W	φ255*H145mm (cutout:235*125mm)	4400-4800lm	4000-4400lm	3800-4000lm
GS-CL3*20WG145	3*20W	φ395*H145mm (cutout:375*125mm)	6600-7200lm	6000-6600lm	5800-6000lm
GS-CL32WG185	32W	φ185*H185mm (cutout:165*165mm)	3200-3500lm	2900-3200lm	2500-2700lm
GS-CL2*32WG185	2*32W	φ370*H185mm (cutout:350*165mm)	6400-7000lm	5800-6400lm	5000-5400lm
GS-CL3*32WG185	3*32W	φ500*H185mm (cutout:480*165mm)	9600-10500lm	8700-9600lm	7500-8400lm

SDL series




Product parameters

Anti-glare : UGR L10-11 R15-19
Beam angle : L15°/24°/36°/60° R24°/40°/60°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

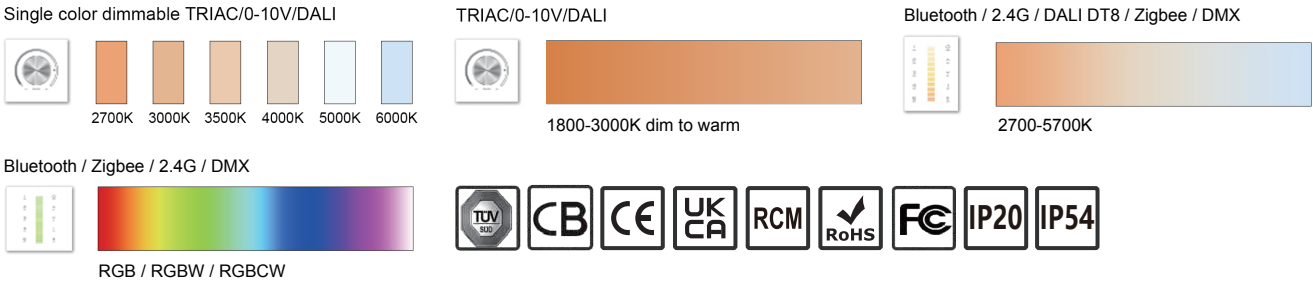

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL8WS92	8W	92*92*H70mm (cutout:φ75-80mm)	750-850lm	700-750lm	650-700lm	53X33X37cm (36 pcs/carton, 15.8kg)
GS-CL2*8WS92	2*8W	175*92*H70mm (cutout:155*75mm)	1500-1700lm	1400-1500lm	1300-1400lm	54X40X38cm (24 pcs/carton, 20.8kg)
GS-CL3*8WS92	3*8W	255*92*H70mm (cutout:235*75mm)	2250-2550lm	2100-2250lm	1950-2100lm	54X40X38cm (12 pcs/carton, 16.4kg)
GS-CL15WS92	15W	92*92*H78mm (cutout:φ75-86mm)	1400-1500lm	1200-1300lm	1000-1100lm	53X33X37cm (36 pcs/carton, 17.8kg)
GS-CL2*15WS92	2*15W	175*92*H78mm (cutout:φ155*75mm)	2800-3000lm	2400-2600lm	2000-2200lm	54X40X38cm (24 pcs/carton, 22.8kg)
GS-CL3*15WS92	3*15W	255*92*H78mm (cutout:235*75mm)	4200-4500lm	3600-3900lm	3000-3300lm	454X40X38cm (12 pcs/carton, 18.8kg)
GS-CL15WS120	15W	120*120*H80mm (cutout:φ95-105mm)	1400-1500lm	1200-1300lm	1000-1100lm	64X42X30cm (24 pcs/carton, 14.8kg)
GS-CL2*15WS120	2*15W	240*120*H80mm (cutout:192*95mm)	2800-3000lm	2400-2600lm	2000-2200lm	52X49X30cm (12 pcs/carton, 14.8kg)
GS-CL3*15WS120	3*15W	330*120*H80mm (cutout:300*95mm)	4200-4500lm	3600-3900lm	3000-3300lm	74X59X30cm (12 pcs/carton, 20.8kg)


SDL series

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-CL20WS140	20W	140*140*H105mm (cutout:φ120-132mm)	2200-2400lm	2000-2200lm	1900-2000lm	56X28X33cm (12 pcs/carton, 13.8kg)
GS-CL2*20WS140	2*20W	280*140*H105mm (cutout:230-120mm)	4400-4800lm	4000-4400lm	3800-4000lm	60X56X28cm (12 pcs/carton, 18.9kg)
GS-CL32WS160	32W	160*160*H120mm (cutout:φ140-155mm)	3200-3500lm	2900-3200lm	2500-2700lm	52X43X32cm (12 pcs/carton, 16.8kg)
GS-CL2*32WS160S	2*32W	310*160*H120mm (cutout:280*140mm)	6400-7000lm	5800-6400lm	5000-5400lm	70X43X32cm (8 pcs/carton, 17.8kg)
GS-CL42WS180	42W	180*180*H130mm (cutout:φ162-180mm)	4000-4300lm	3700-4000lm	3200-3500lm	47X42X33cm (8 pcs/carton, 12.8kg)
GS-CL2*42WS180	2*42W	350*180*H130mm (cutout:φ330-153mm)	8000-8600lm	7400-8000lm	6400-7000lm	47X42X33cm (4 pcs/carton, 12.8kg)


MDL series

Product parameters

Beam angle : 90°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.5
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

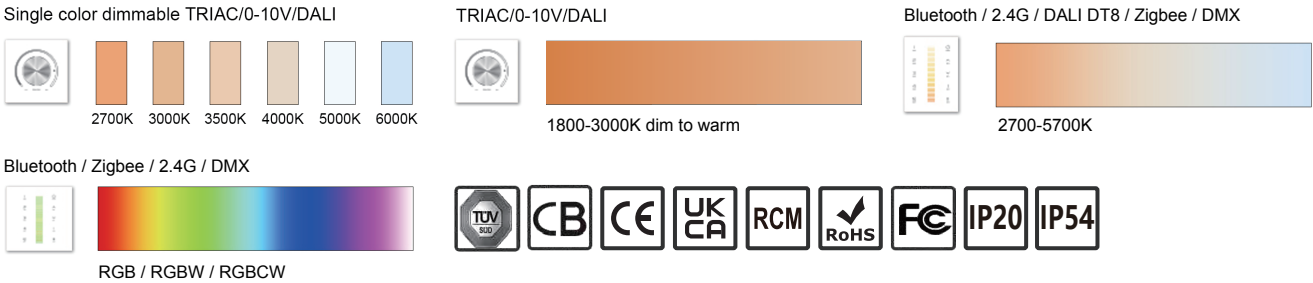

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-CL6WM72	6W	φ72*51mm (cutout:φ60-65mm)	420-480lm	380-420lm	no
GS-CL10WM88	10W	φ88*57mm (cutout:φ75-80mm)	700-800lm	650-700lm	no
GS-CL15WM102	15W	φ102*57mm (cutout:φ90-95mm)	800-900lm	750-800lm	no


LDL series

Product parameters

Anti-glare : UGR 12-15
Beam angle : 10°/15°/24°/38°/50°
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.5
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years



Dimmable

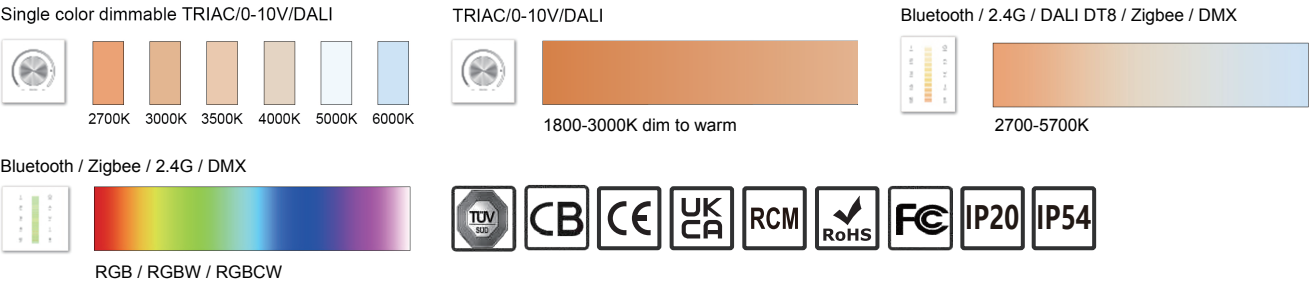

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-CL6WL63	6W	φ62*H86mm (cutout:φ55mm)	750-800lm	700-750lm	600-650lm
GS-CL8WL84	8W	φ84*H104mm (cutout:φ75mm)	750-850lm	700-750lm	650-700lm
GS-CL15WL110	15W	φ110*H127mm (cutout:φ95mm)	1400-1500lm	1200-1300lm	1000-1100lm
GS-CL25WL110	25W	φ110*H120mm (cutout:φ95mm)	2500-2800lm	2300-2600lm	2100-2300lm
GS-CL32WL130	32W	φ130*H140mm (cutout:φ115mm)	3200-3500lm	2900-3200lm	2500-2700lm