


LED SURFACE MOUNTED LIGHT SERIES

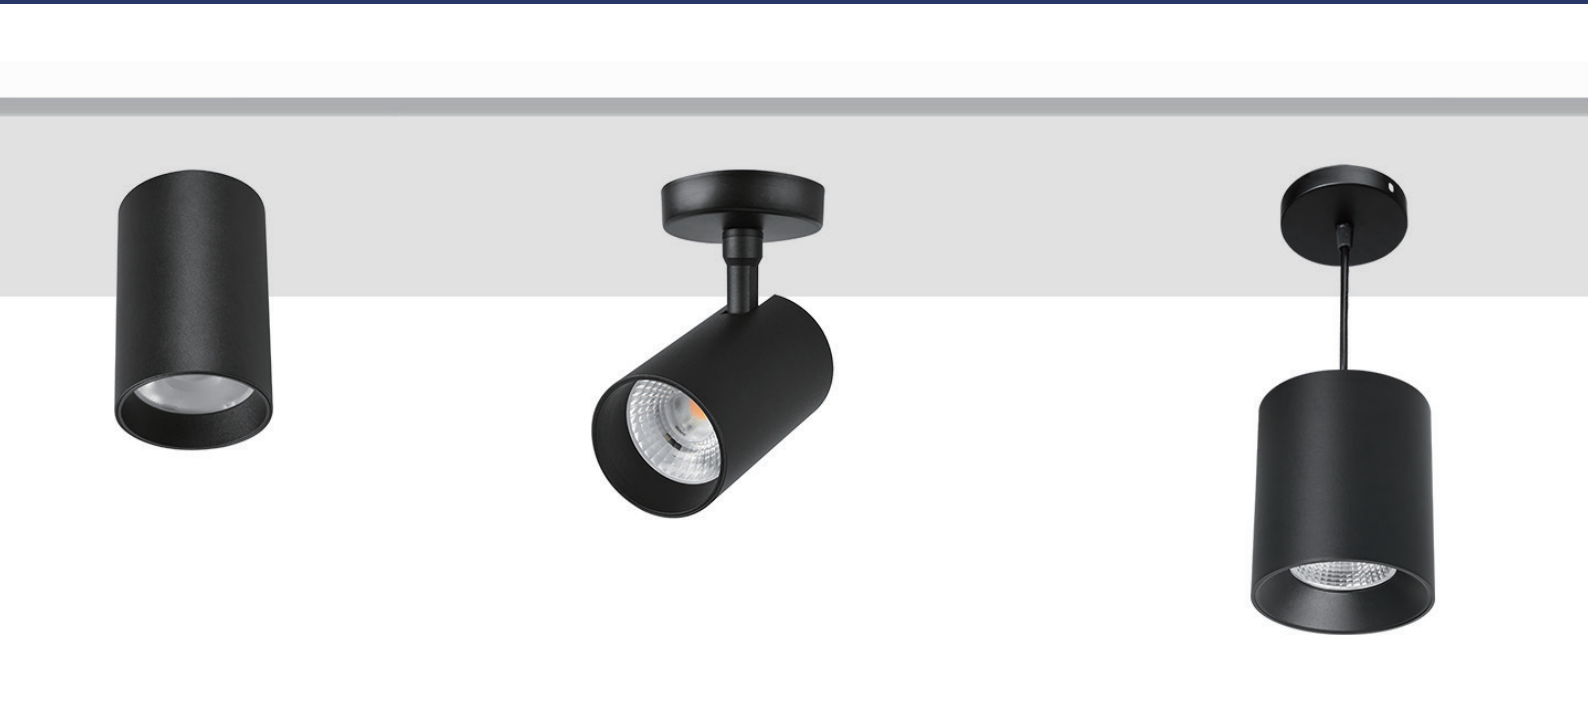

CONTENTS

SPE SERIES P73

SPZ SERIES P74

SFS SERIES P75

SFG SERIES P76

SFD SERIES P77

SFF SERIES P78


SFB SERIES P79

WFG SERIES P80


WFS SERIES P81

SPE series

SPZ series

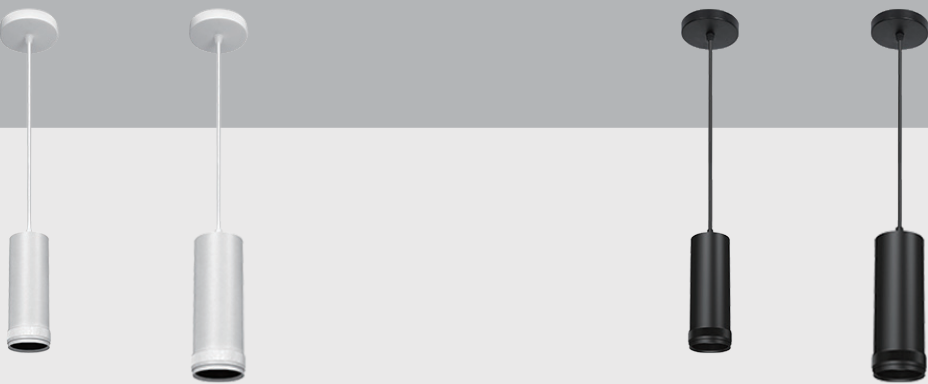

-  L / 15°/24°/36°/60° / UGR10-15
-  Y / 15°/24°/36°/60° / UGR13-19
-  R / 30°/40°/60° / UGR13-19




-  15°-60° Zoomable/ UGR12-15
-   Anti-glare elements

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years

Dimmable

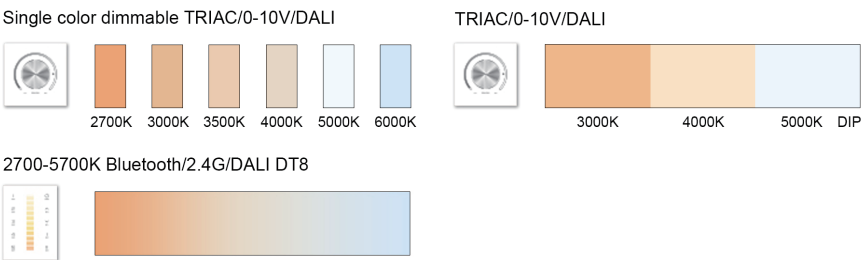


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-PL12WE55	12W	φ55*L150mm	1100-1200lm	1000-1100lm	900-1000lm	38.5X35.5X30.5cm (16 pcs/carton, 15kg)
GS-PL20WE66	20W	φ66*L160mm	2100-2400lm	1900-2100lm	1700-2000lm	44X29X33cm (20 pcs/carton, 17.5kg)
GS-PL25WE77	25W	φ77*L170mm	2500-2800lm	2300-2600lm	2100-2300lm	50X30X39cm (20 pcs/carton, 20.8kg)
GS-PL36WE88	36W	φ88*L175mm	3700-4200lm	3400-3800lm	3200-3400lm	56X31X33cm (15 pcs/carton, 15.3kg)
GS-PL42WE99	42W	φ99*L175mm	4500-4800lm	4100-4400lm	3700-4000lm	56X31X33cm (15 pcs/carton, 15.3kg)

SFS series




-  L / 15°/24°/36°/60° / UGR10-15
-  Y / 15°/24°/36°/60° / UGR13-19
-  R / 30°/40°/60° / UGR13-19



Product parameters



- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years

Dimmable

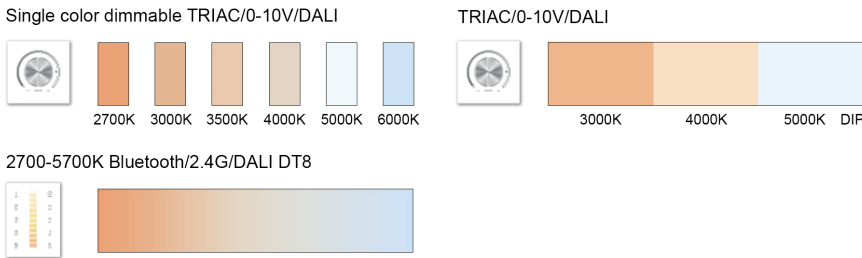

Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-FL10WS74	10W	φ74*L115mm	900-1000lm	800-900lm	700-800lm	35.5X33.5X37cm (32 pcs/carton, 20kg)
GS-FL15WS74	15W	φ74*L115mm	1400-1600lm	1300-1400lm	1100-1200lm	35.5X33.5X37cm (32 pcs/carton, 20kg)
GS-FL20WS94	20W	φ94*L150mm	2100-2400lm	1900-2100lm	1700-2000lm	36.5X33X34.5cm (18 pcs/carton, 12kg)
GS-FL32WS114	32W	φ114*L155mm	3300-3600lm	3000-3300lm	2800-3100lm	39X37.5X40cm (18 pcs/carton, 15kg)
GS-FL42WS114	42W	φ114*L155mm	3400-3700lm	3000-3300lm	2700-3000lm	39X37.5X40cm (18 pcs/carton, 15kg)


SFG series

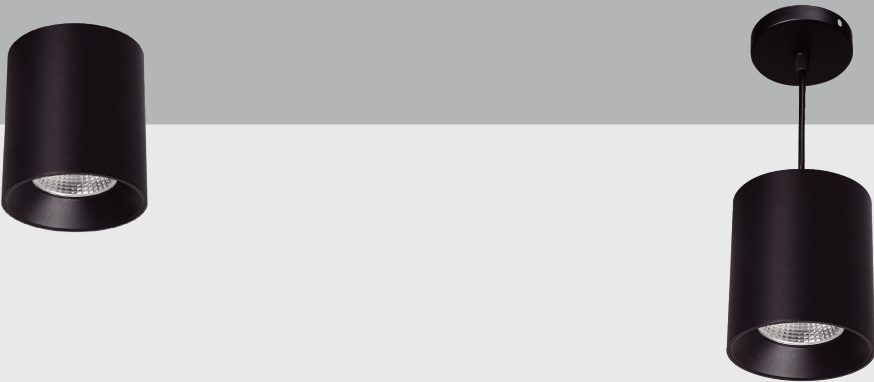

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years

Dimmable

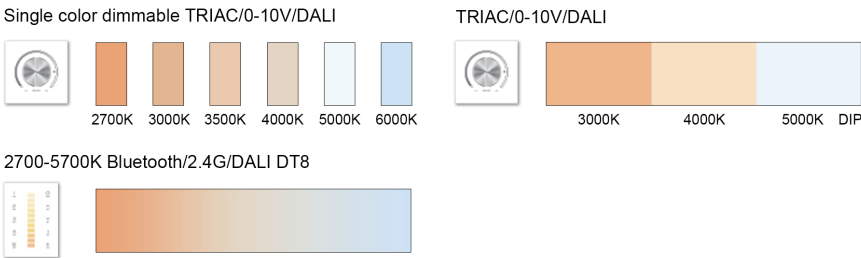


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-FL15WG74	15W	φ74*L147mm	1400-1600lm	1300-1400lm	1100-1200lm	35.5X33.5X37cm (32 pcs/carton, 20kg)
GS-FL20WG97	20W	φ97*L152mm	2300-2400lm	2000-2100lm	1800-2000lm	36.5X33X34.5cm (18 pcs/carton, 12kg)
GS-FL32WG115	32W	φ115*L135mm	no	3600-3900lm	no	39X37.5X40cm (18 pcs/carton, 15kg)
GS-FL42WG140	42W	φ140*L160mm	4400-4800lm	3800-4200lm	3400-3700lm	37.5X31.5X33cm (8 pcs/carton, 12kg)
GS-FL52WG171	52W	φ171*L198mm	5200-5500lm	4800-5000lm	4400-4600lm	45.5X37.5X39cm (8 pcs/carton, 15kg)
GS-FL66WG186	66W	φ186*L214mm	6500-7000lm	5500-6000lm	5100-5500lm	48.5X40.5X42cm (8 pcs/carton, 16kg)

SFD series

IP65

SFF series



Reflector /15°/30°/45°




Lens /20°/40°

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years

Dimmable

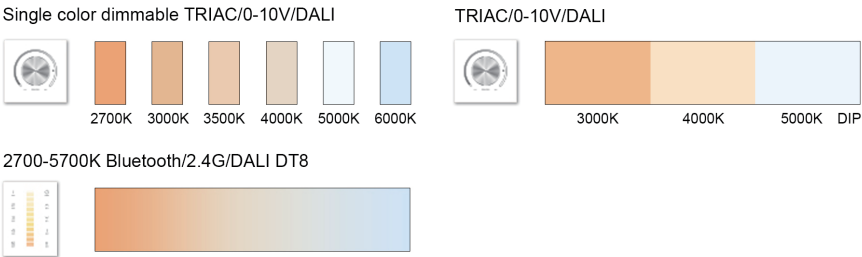


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-FL15WD76	15W	φ76*L150mm	1100-1200lm	1000-1100lm	900-1000lm	35.5X33.5X37cm (32 pcs/carton, 20kg)
GS-FL20WD96	20W	φ96*L150mm	1500-1700lm	1400-1500lm	1300-1400lm	36.5X33.5X34.5cm (18 pcs/carton, 12kg)
GS-FL32WD116	32W	φ116*L150mm	2400-2700lm	2200-2500lm	2000-2200lm	39X37.5X40cm (18 pcs/carton, 15kg)
GS-FL42WD142	42W	φ142*L160mm	3500-4000lm	3000-3400lm	2700-3000lm	37.5X31.5X33cm (8 pcs/carton, 12kg)
GS-FL52WD171	52W	φ171*L180mm	4500-5000lm	4000-4500lm	3800-4200lm	45.5X37.5X39cm (8 pcs/carton, 15kg)
GS-FL66WD205	66W	φ205*L210mm	5500-6000lm	5000-5500lm	4500-5000lm	47.5X45.5X47cm (8 pcs/carton, 20kg)
GS-FL15WDS76	15W	φ76*L150mm	1100-1200lm	1000-1100lm	900-1000lm	35.5X33.5X37.5cm (32 pcs/carton, 20kg)
GS-FL20WDS96	20W	φ96*L150mm	1500-1700lm	1400-1500lm	1300-1400lm	36.5X33X34.5cm (18 pcs/carton, 12kg)
GS-FL32WDS116	32W	φ116*L150mm	2400-2700lm	2200-2500lm	2000-2200lm	39X37.5X40cm (18 pcs/carton, 15kg)

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years

Dimmable

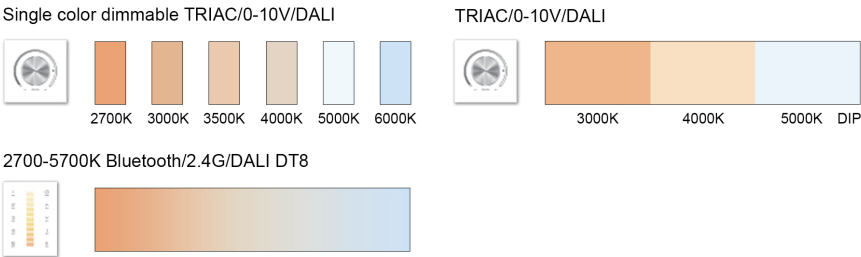


Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-FL8WF75	8W	φ75*L100mm	700-800lm	650-750lm	600-650lm	\
GS-FL15WF75	15W	φ75*L152mm	1100-1200lm	1000-1100lm	900-1000lm	35.5X33.5X37cm (32 pcs/carton, 20kg)
GS-FL15WF95	15W	φ95*L100mm	1100-1200lm	1000-1100lm	900-1000lm	\
GS-FL20WF95	20W	φ95*L152mm	1500-1700lm	1400-1500lm	1300-1400lm	36.5X33X34.5cm (18 pcs/carton, 12kg)
GS-FL32WF115	32W	φ115*L152mm	2400-2700lm	2200-2500lm	2000-2200lm	39X37.5X40cm (18 pcs/carton, 15kg)
GS-FL42WF140	42W	φ140*L162mm	3500-4000lm	3000-3400lm	2700-3000lm	39.5X31.5X33cm (8 pcs/carton, 12kg)
GS-FL52WF170	52W	φ170*L182mm	4500-5000lm	4000-4500lm	3800-4200lm	45.5X37.5X39cm (8 pcs/carton, 15kg)
GS-FL72WF205	72W	φ205*L212mm	6000-6500lm	5500-6000lm	5000-5500lm	47.5X45.5X47cm (8 pcs/carton, 20kg)

SFB series



Lens /15°/24°/36°/55°

WFG series

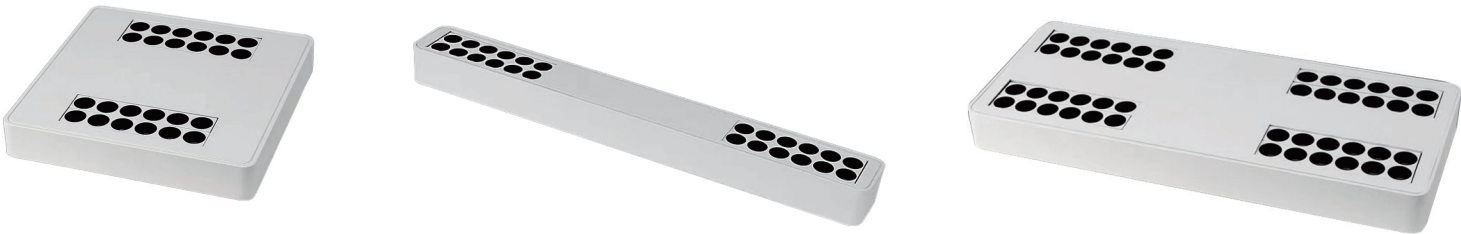


Lens /15°/24°/36°

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years

Dimmable

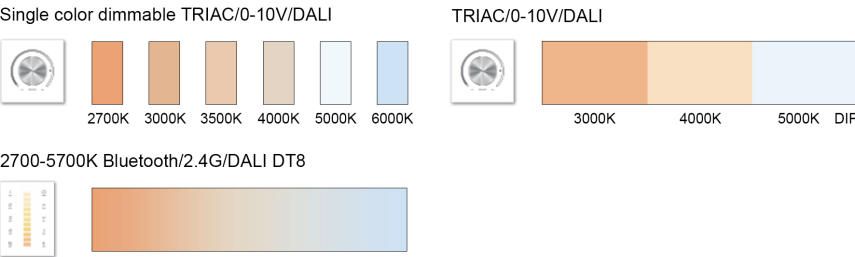


Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-FL8WB75	8W	75*75*H79mm	700-800lm	650-750lm	600-650lm
GS-FL2*8WF75	2*8W	75*150*H79mm	1400-1600lm	1300-1500lm	1200-1300lm
GS-FL15WB95	15W	100*100*H93mm	1350-1500lm	1200-1350lm	1000-1100lm
GS-FL2*15WB95	2*15W	100*200*H93mm	2700-3000lm	2400-2700lm	2000-2200lm
GS-FL24WB95	24W	120*120*H112mm	2200-2400lm	2000-2200lm	1800-2000lm
GS-FL2*24WB95	2*24W	120*240*H112mm	4400-4800lm	4000-4400lm	3600-4000lm

Product parameters

- Anti-glare : UGR<19
- Input voltage : 200-240vAC/100-277vAC
- Power factor : PF>0.9
- SDCM : <3
- Color of frame : white/black/customed
- Flicker Free : 0.002
- Life span : 50,000 hrs
- Warranty : 5 years

Dimmable

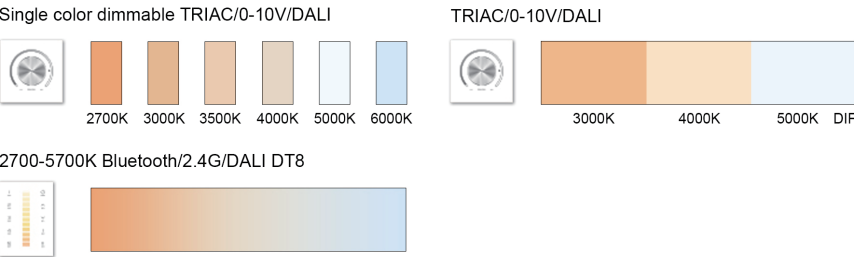

Model	Power	Size	Output		
			CRI80	CRI90	CRI97
GS-WL20WG200	20W	200*200*H38mm	1600-1800lm	1400-1600lm	no
GS-WL20WG430	20W	430*55*H38mm	1600-1800lm	1400-1600lm	no
GS-WL40WG360	40W	360*155*H38mm	3200-3600lm	2800-3200lm	no

WFS series



Reflector / 30°/40°/60°



Lens / 15°/24°/36°/60°



A



B

Product parameters

Anti-glare : UGR<19
Input voltage : 200-240vAC/100-277vAC
Power factor : PF>0.9
SDCM : <3
Color of frame : white/black/customed
Flicker Free : 0.002
Life span : 50,000 hrs
Warranty : 5 years

Dimmable

Single color dimmable TRIAC/0-10V/DALI



2700K



3000K



3500K



4000K



5000K



6000K

TRIAC/0-10V/DALI



3000K



4000K



5000K



6000K

DIP

2700-5700K Bluetooth/2.4G/DALI DT8



Model	Power	Size	Output			Package
			CRI80	CRI90	CRI97	
GS-WL8WS55	8W	φ55*L120mm	750-800lm	650-700lm	600-700lm	52x41x35cm (16 pcs/carton, 10.5kg)
GS-WL15WS66	15W	φ66*L125mm	1400-1600lm	1300-1400lm	1100-1200lm	52x41x35cm (16 pcs/carton, 12.5kg)
GS-WL20WS77	20W	φ77*L140mm	2300-2400lm	2000-2100lm	1800-2000lm	58X47X34cm (15 pcs/carton, 13.8kg)
GS-WL32WS88	32W	φ88*L160mm	3300-3600lm	3000-3300lm	2800-3100lm	58X47X34cm (15 pcs/carton, 13.8kg)
GS-WL42WS99	42W	φ99*L160mm	4100-4400lm	3800-4000lm	3500-3700lm	58X52X41cm (12 pcs/carton, 19.8kg)
GS-WL14WLO43	14W	43*40*L164mm	1000-1200lm	900-1000lm	no	43.5x43.5x30cm (18 pcs/carton, 13kg)
GS-WL23WLO43	23W	43*40*L243mm	1500-1600lm	1300-1500lm	no	48.5x29.5x30cm (12 pcs/carton, 11.5kg)
GS-WL32WLO43	32W	43*40*L323mm	2200-2500lm	1900-2100lm	no	44.5x35.5x30cm (9 pcs/carton, 11kg)
GS-WL35WMU119	35W	119*119*L53mm	2900-3200lm	2500-2800lm	no	43.5X35.5X30cm (12 pcs/carton)